



CEE – 101 EYE BALL EMERGENCY RECESSED MOUNTING

HIGH EFFICIENCY ENERGY CONSERVING EMERGENCY LIGHTING LUMINAIRE




Technical Data

Mode of Operation	: Non-Maintained
Input Voltage	: 240V \pm 10%, 50Hz
Battery	: Hi-Temp. Nickel Cadmium Battery
Charging Current	: 70mA (Nominal)
Lamp Used	: 1.0 Watt LED Class II Lumen : 70lm
Operating Temperature	: ta-35°C
Charger	: Fully Automatic Constant Current Solid-State Electronic Provide High Reliability with Trickle Charge-Facility
Indication	: Red L.E.D. "On" Indicates Charging. Equipped with Push Test-Switch to Simulate Power Failure.
Backup Time	: 3 Hours Duration.
Construction	: Injection Moulded Fire-Retardant ABS Polyester Casing
Weight	: \pm 0.125kg
Protection	: Low-Voltage Cut-Off to Prevent Over-Discharge of Battery
#Warranty	: Component (Warranty 5 Years) , Battery (Warranty 1 year)

Recessed Mounting

Dimension in mm
Tolerance : \pm 0.03

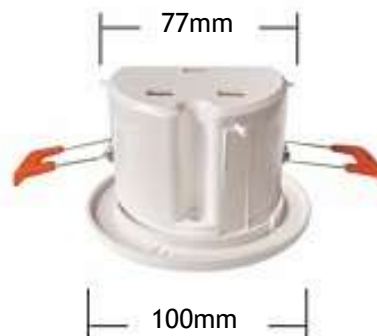

Cut Off



Surface Frame is optional
(Exclude)

