


imitos SMD 5050-60P IP20

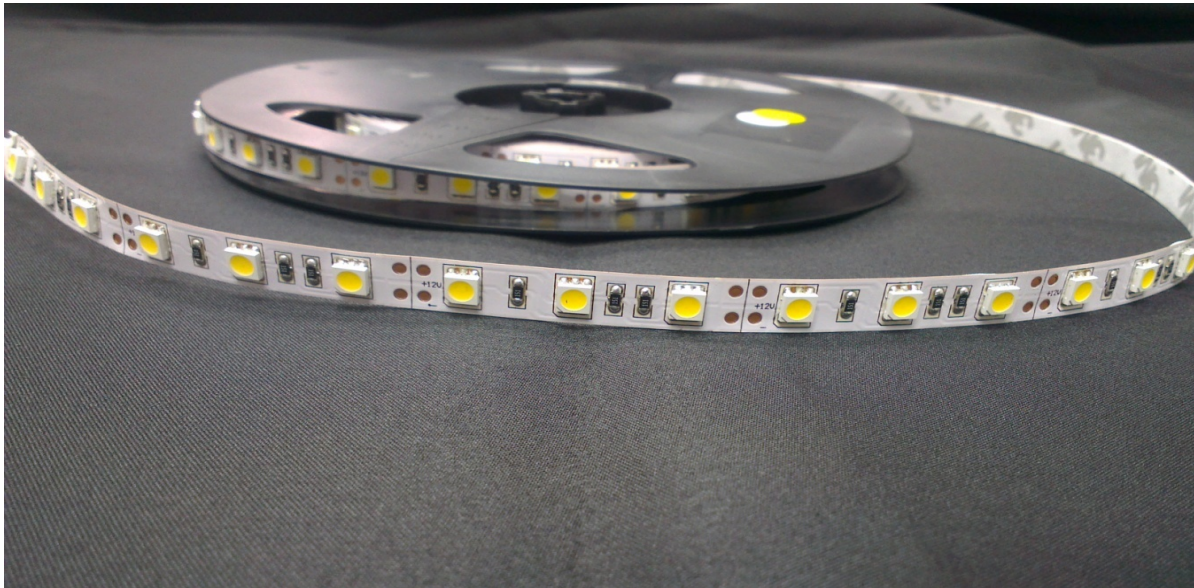

SMD 5050-60P

Model	Colour	Power	Voltage	LED Qty/m	Luminous (lm)/m	Ingress Protection (IP)	Viewing Angle	Packing
SMD 5050-60P	6000k	14.4w per meter	DC 12V ONLY	60	900-960lm	IP 20	120°	5meters/reel
SMD 5050-60P	2700k			60	870-930lm	IP 20	120°	
SMD 5050-60P	3000k			60	870-930lm	IP 20	120°	
SMD 5050-60P	RED			60	240-300lm	IP 20	120°	
SMD 5050-60P	BLUE			60	180-240lm	IP 20	120°	
SMD 5050-60P	GREEN			60	540-600lm	IP 20	120°	
SMD 5050-60P	RGB(MULTI)			60	270-320lm	IP 20	120°	

* Operating Temperature: -25~+60°C

* Installation surface must be smooth, clean and dry.

* The part of LED components cannot be fixed on the surface of the sharp edge.

* LED strip cannot be bent or folded.

* LED strip can be cut following the cutting lines with every 3pcs LED.