




## LED Flood Light (PF 0.6) (ECO TYPE)

**APPLICATION**  
Parks, Gardens, Billboard, Facade Lightings, Parking Areas, Commercial and Residential Areas.



- FEATURES**
- Built-In IC TECHNOLOGY
  - Over temperature protection
  - No external driver required
  - Filtered waveform, Stable voltage
  - High system efficiency
  - Thin & light weight size

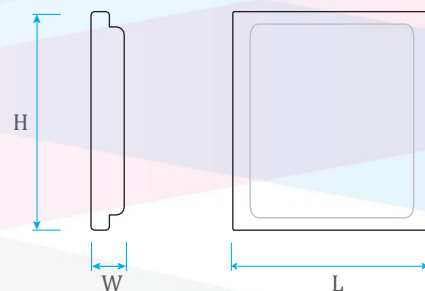

## LUMINAIRE SPECIFICATION

- Power : 30W/50W/100W/150W/200W
- Fitting Material : Die-cast Aluminium Non-corrosive
- Optical Cover : UV-Proof PC Optical Len
- Color Temperature : Warm White/Cool White/Day Light
- Fitting Color : Black
- Ingress Protection : IP66
- Impact Protection : IK08
- Voltage : AC100~240V 50/60Hz
- Electrical Safety Class : Class I
- Operating Temperature : -30°C ~ +40°C
- Installation : Mounting Bracket
- Surge Protections : 4KV
- Pre-Wire : 300 mm
- Color Rendering Index : CRI > 70
- Lifetime : 15,000Hrs



| Model       | Power (W) | Input Voltage | CCT (K)        | Lumen (lm) | PF  | IP | Size L x W x H (mm) | Net Weight | Packing |
|-------------|-----------|---------------|----------------|------------|-----|----|---------------------|------------|---------|
| BSFL-3030-1 | 30W       | 100~240       | 3000/6500      | 3000       | 0.6 | 66 | 159 x 29 x 182      | 0.5 kg     | 20/CTN  |
| BSFL-3050-1 | 50W       | 100~240       | 3000/6500      | 5000       | 0.6 | 66 | 184 x 29 x 219      | 0.9 kg     | 20/CTN  |
| BSFL-3100-1 | 100W      | 100~240       | 3000/4000/6500 | 10000      | 0.6 | 66 | 238 x 29 x 274      | 1.7 kg     | 10/CTN  |
| BSFL-3150-1 | 150W      | 100~240       | 3000/6500      | 15000      | 0.6 | 66 | 272 x 31 x 293      | 2.8kg      | 10/CTN  |
| BSFL-3200-1 | 200W      | 100~240       | 3000/4000/6500 | 20000      | 0.6 | 66 | 316 x 31 x 344      | 3.3 kg     | 10/CTN  |

Remark \*: All result tested based on 6500K