

MIWIO

UPGRADE YOUR LIGHTSTYLE
BY ELEGANT



LED PANEL LIGHT SURFACE

features

- ⇒ Slim and light, easy to install
- ⇒ No dark spot, soft and uniform light, comfortable to eyes
- ⇒ Light guide plate rates above 80%
- ⇒ The use of external constant current driver provides stable performance with no flicker
- ⇒ Beam Angle: 180°
- ⇒ Designed for a connection with AC 85 ~ 265 V

standard specification

Lifetime

25,000 hours

Colour Temp

available in

warmwhite (3000K)

coolwhite (4000K)

daylight (6500K)

Applications




Shape

available in

round (R)

square (S)

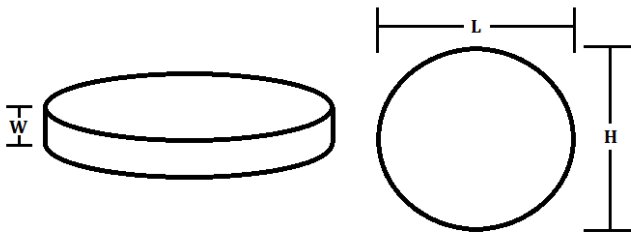

Size (inch)	Height (mm)	Length (mm)	Width (mm)
6	165	165	28
8	210	210	28
12	285	285	28

Description	Watt (W)	Lumen (LM)	Size	Beam Angle	CCT	Standard Pack
MW-SF6S	18	1450	6 inch	180°	3000K,4000K,6500K	30 pcs/ ctn
MW-SF6R	18	1450	6 inch	180°	3000K,4000K,6500K	30 pcs/ ctn
MW-SF8S	24	1920	8 inch	180°	3000K,4000K,6500K	30 pcs/ ctn
MW-SF8R	24	1920	8 inch	180°	3000K,4000K,6500K	30 pcs/ ctn
MW-SF12S	30	2400	12 inch	180°	3000K,4000K,6500K	30 pcs/ ctn
MW-SF12R	30	2400	12 inch	180°	3000K,4000K,6500K	30 pcs/ ctn