

MIWIO

UPGRADE YOUR LIGHTSTYLE
BY ELEGANT

LED T5 FITTING



features

- ⇒ Adopt high efficiency LED chip and heat dissipation design, ensure the LED has high efficiency, low light wave and long lifetime
- ⇒ Adopt constant current drivers switching power supply, with an input voltage of AC 220 ~ 240 V
- ⇒ Environment friendly and safe, with no pollution, in accordance with ROHS standard
- ⇒ Short start-up time, and easy to install



standard specification

Long Lifetime

30,000 hours

Applications






Colour Temp

available in

warmwhite (3000K)

coolwhite (4000K)

daylight (6500K)

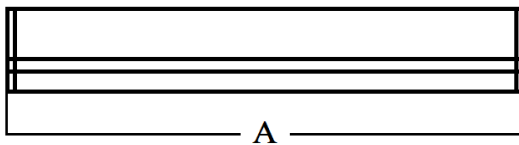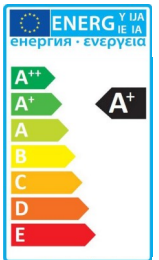

Watt (W)	Length (mm) [A]	Height (mm) [B]	Width (mm) [C]
5.5	285	35	22
9.5	570	35	22
14.5	870	35	22
18.5	1170	35	22

Description	Watt (W)	Voltage (V)	Lumen (LM)	CCT	CRI	Standard Pack
MW-5T5	5.5	AC 220 ~ 240	504	3000K ~ 6500K	≥ 70	50 pcs/ ctn
MW-9T5	9.5	AC 220 ~ 240	756	3000K ~ 6500K	≥ 70	50 pcs/ ctn
MW-14T5	14.5	AC 220 ~ 240	1092	3000K ~ 6500K	≥ 70	50 pcs/ ctn
MW-18T5	18.5	AC 220 ~ 240	1450	3000K ~ 6500K	≥ 70	50 pcs/ ctn