

LED STICK BULB

features

- ⇒ Adopt high efficiency LED chip and heat dissipation design, ensure the LED has high efficiency, low light wave and long lifetime
- ⇒ Adopt constant current drivers switching power supply, with the input voltage of 220 ~ 240 V
- ⇒ Environmental friendly and safe, with no pollution, in accordance with the ROHS standard
- ⇒ Short start-up time
- ⇒ High colour rendering index, restore true colour of environment

standard specification

Long Lifetime

30,000 hours


Colour Temp

available in


warmwhite (3000K)

coolwhite (4000K)

daylight (6500K)



Applications

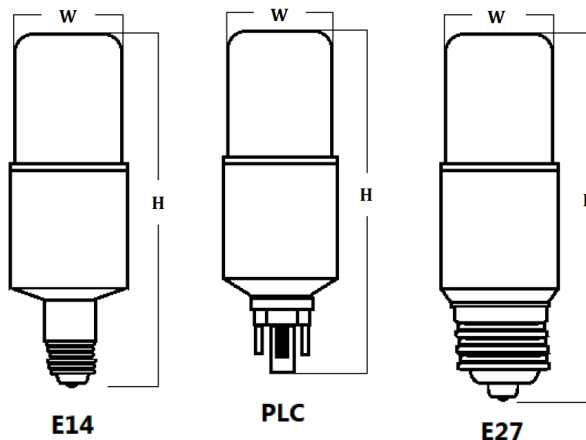

Watt (W)	Width (mm)	Height (mm)
6.5	30	100
9.5	37	124.5
15	50	150

Description	Watt (W)	Voltage (V)	Lumen (LM)	CCT	Base Type	Beam Angle	CRI	Standard Pack
CSG-LS654E	6.5	AC 220 ~ 240	450	3000K, 4000K, 6500K	E14	180°	≥ 80	100 pcs /ctn
CSG-LS656E	6.5	AC 220 ~ 240	450	3000K, 4000K, 6500K	E27	180°	≥ 80	100 pcs /ctn
CSG-LS950P	9.5	AC 220 ~ 240	720	3000K, 4000K, 6500K	PLC	180°	≥ 80	100 pcs /ctn
CSG-LS980P	15	AC 220 ~ 240	1350	3000K, 4000K, 6500K	PLC	180°	≥ 80	100 pcs /ctn