

COSGO

UPGRADE YOUR LIGHTSTYLE
BY ELEGANT

SUPER BRIGHT

LED ECO DOWNLIGHT



features

- ⇒ Slim and light, easy to install
- ⇒ Major energy saving
- ⇒ Elegant appearance, unobstructive in the design of your home, office, or commercial space
- ⇒ High quality, high brightness
- ⇒ Designed for a connection with a 220 ~ 240 V, 50/60 Hz
- ⇒ High CRI of ≥ 80 Ra



standard specification

Lifetime

15,000 hours

Colour Temp

available in

warmwhite (3000K)



coolwhite (4000K)

daylight (6500K)

Applications



Approved by:

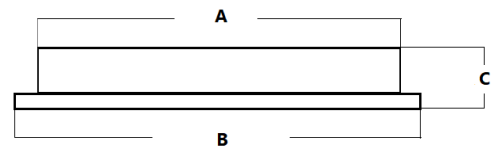

DIMENSIONS (MM)			
Frame	4 inch	6 inch	8 inch
Light Panel [A]	150 X 150	175 X 175	220 X 220
Cut Out [B]	110 X 110	140 X 140	200 X 200
Width [C]	27.5	27.5	30

Description	Watt (W)	Voltage (V)	Lumen (LM)	CCT	CRI	Standard Pack	Shape
CGEC-4R12	12	AC 220 ~ 240	1080	3000K ~ 6500 K	≥ 80	60 pcs/ ctn	Round
CGEC-4S12	12	AC 220 ~ 240	1080	3000K ~ 6500 K	≥ 80	60 pcs/ ctn	Square
CGEC-6R18	18	AC 220 ~ 240	1620	3000K ~ 6500 K	≥ 80	30 pcs/ ctn	Round
CGEC-6S18	18	AC 220 ~ 240	1620	3000K ~ 6500 K	≥ 80	30 pcs/ ctn	Square
CGEC-8R24	24	AC 220 ~ 240	2160	3000K ~ 6500 K	≥ 80	30 pcs/ ctn	Round
CGEC-8S24	24	AC 220 ~ 240	2160	3000K ~ 6500 K	≥ 80	30 pcs/ ctn	Square