

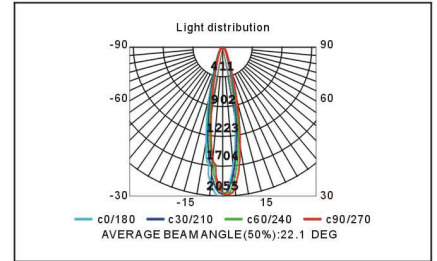


# LED Spike Light

## P9075/5W-MINI P9075/3W-RGB

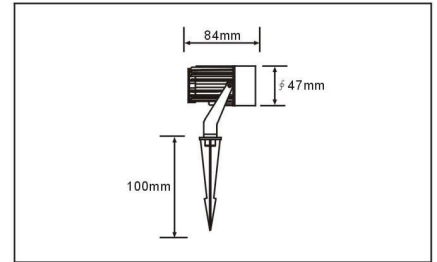

Available color:






CODE	W	LM	PF	TA	Beam Angle	Material
P9075/5W-MINI	5W	500	>0.5	-25°C~+50°C	24°	Aluminum
P9075/3W-RGB	3W	300	>0.5	-25°C~+50°C	24°	Aluminum

LED  
 85-265V 50Hz  
 3000K ~ 6400K  
 Energy  
 Ra > 80  
  
  
 50,000h Long Life  
 Flicker Free  
 IP65

## P9075/12W-S P9075/6W-RGB



Available color:

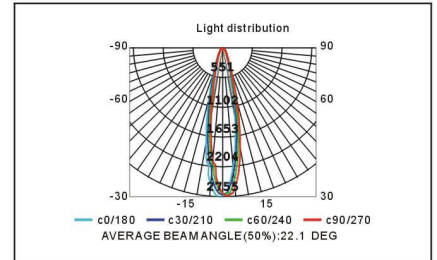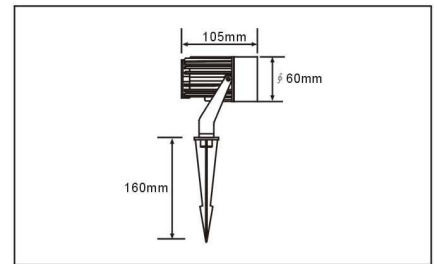




CODE	W	LM	PF	TA	Beam Angle	Material
P9075/12W-S	12W	1200	>0.5	-25°C~+50°C	24°	Aluminum
P9075/6W-RGB	6W	600	>0.5	-25°C~+50°C	24°	Aluminum

LED  
 85-265V 50Hz  
 3000K ~ 6400K  
 Energy  
 Ra > 80  
  
  
 50,000h Long Life  
 Flicker Free  
 IP65

## P9075/18W-L P9075/9W-RGB



Available color:

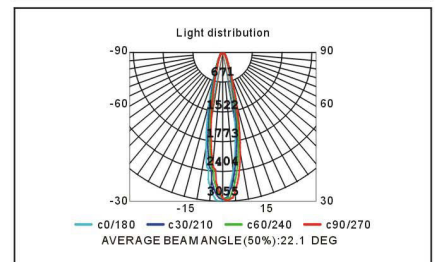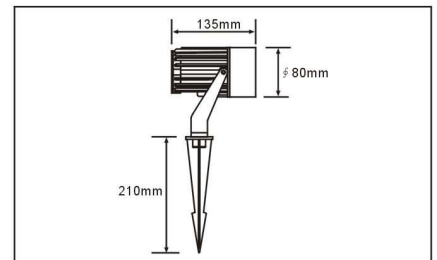

CODE	W	LM	PF	TA	Beam Angle	Material
P9075/18W-L	18W	1800	>0.5	-25°C~+50°C	24°	Aluminum
P9075/9W-RGB	9W	900	>0.5	-25°C~+50°C	24°	Aluminum

LED  
 85-265V 50Hz  
 3000K ~ 6400K  
 Energy  
 Ra > 80  
  
  
 50,000h Long Life  
 Flicker Free  
 IP65