

BACKLIT LED PANEL LIGHT

COMMERCIAL VERSION

features

- ⇒ The use of **isolation driver** provides stable performance with **no flicker**
- ⇒ High quality, High brightness
- ⇒ Slim and light, easy to install
- ⇒ Uses **eyecare LED**, making it comfortable to eyes
- ⇒ Designed for a connection with an AC 90 ~ 265 V/ 50 ~ 60 Hz
- ⇒ Long service life of 50, 000 hours to brighten up your space
- ⇒ Power Factor: 0.95

standard specification

Long Lifetime

50, 000 hours

Colour Temp

available in


coolwhite (4000K)

daylight (6500K)




Applications



Luminous Intensity Distribution

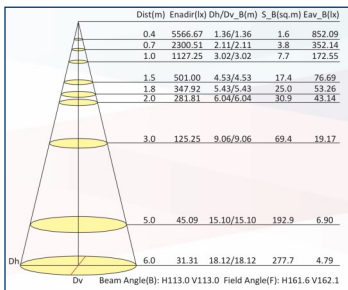

Luminous at a distance

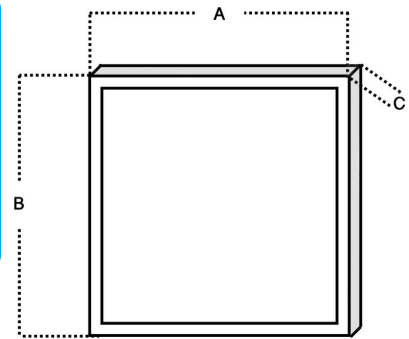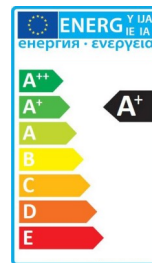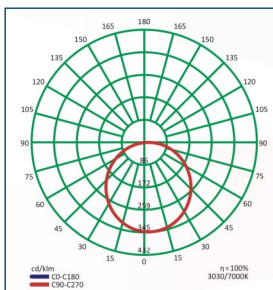

DIMENSIONS (MM)				
Model	BELG-2248	BELG-3348	BELG-2496	BELG-3648
Length [A]	595	600	1195	1200
Height [B]	595	600	595	600
Width [C]	30	30	30	30

Description	Watt (W)	Voltage (V)	Lumen (LM)	CCT	CRI	Standard Pack
BELG-2248	48	AC 90 ~ 265	4650	4000K, 6500 K	≥ 80	10 sets/ ctn
BELG-3348	48	AC 90 ~ 265	4650	4000K, 6500 K	≥ 80	10 sets/ ctn
BELG-2496	96	AC 90 ~ 265	9300	4000K, 6500 K	≥ 80	4 sets/ ctn
BELG-3648	96	AC 90 ~ 265	9300	4000K, 6500 K	≥ 80	4 sets/ ctn