
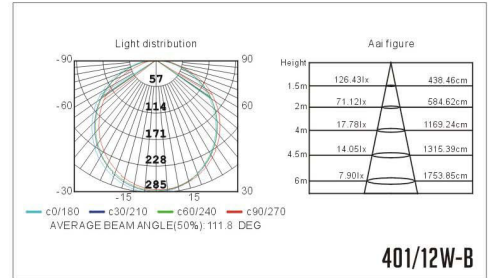


LED Down light

401/601-B SERIES

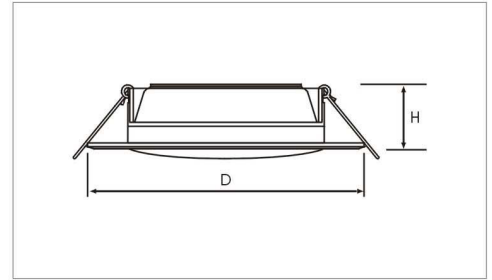


401/12W-B

Detailed parameters

CODE	W	LM	PF	Lamp Size D*H(mm)	Cut out: (mm)	TA	Material
401/12W-B	12W	1200	>0.5	φ 147x35	φ 110	-25°C~+50°C	Aluminum
601/18W-B	18W	1800	>0.5	φ 180x36	φ 145	-25°C~+50°C	Aluminum



LED
 85-265V 50Hz
 3000K ~ 6400K
 Energy Star
 Ra > 80

 50,000h Long Life
 Flicker Free
 IP20

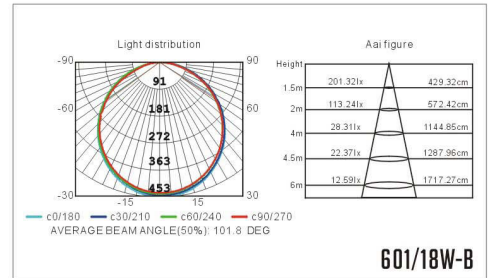

601/18W-B

401/601 SERIES

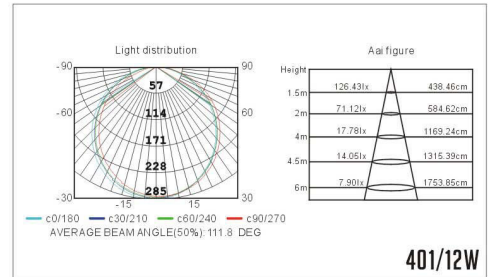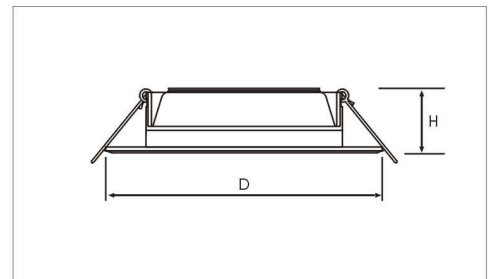


401/12W

Detailed parameters

CODE	W	LM	PF	Lamp Size D*H(mm)	Cut out: (mm)	TA	Material
401/12W	12W	1200	>0.5	φ 147x35	φ 110	-25°C~+50°C	Aluminum
601/18W	18W	1800	>0.5	φ 180x36	φ 145	-25°C~+50°C	Aluminum

LED
 85-265V 50Hz
 3000K ~ 6400K
 Energy Star
 Ra > 80

 50,000h Long Life
 Flicker Free
 IP20

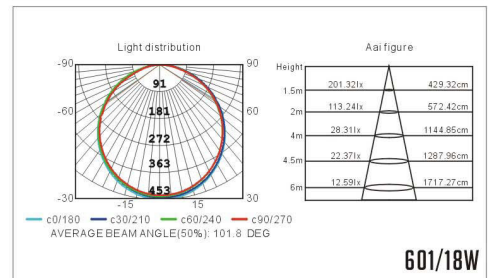

601/18W