

# TUNGSRAM™

## New LED BrightStik™



**New LED Bright Stik™** illuminates spaces with light instantly. Its sleek cylindrical shape fits in place where a traditional bulb or CFL doesn't fit. Replace now with LED Bright Stik™ and keep saving for the next 15 years\*. (\*Bases on 2.7 hours of per day use.)

That's a long time you can spend not worrying about light bulbs.



## Application areas



Retail



Hospitality



Home

Product Code	Product Description	Wattage (W)	CCT (K)	Lumen (lm)	Efficacy (lm/W)	Pack Qty (PCS)
<b>New LED BrightStik™</b>						
93064058	LED 9/STIK/830/220-240V/E27	9	3000	810	90	1/15
93110188	LED 9/STIK/840/220-240V/E27	9	4000	850	95	1/15
93064059	LED 9/STIK/865/220-240V/E27	9	6500	850	95	1/15
93085439	LED15/STIK/830/220-240V/E27	15	3000	1521	101	1/15
93110203	LED15/STIK/840/220-240V/E27	15	4000	1600	106	1/15
93089074	LED15/STIK/865/220-240V/E27	15	6500	1600	106	1/15

### Recommended Operation Temperature


Ths Max for L70 105C  
Ths Max for B50 105C  
Thermal test point



### Feature & Benefits

- Voltage 220-240V 50/60Hz
- CRI > 80
- Life Time 15,000 Hours L70
- Beam angle 240°
- Switching cycles 100 000
- Warm up time: Instant on
- Power factor: >0.5
- Ambient temperature range -20° C to +40°C.
- Color consistency < 6 SDCM
- Visual Comfort – RGO & Flicker Free

### Dimension (mm)

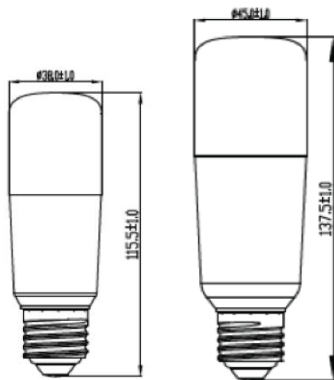

EFFICACY Value: 100 lm/W



This product has been tested up to 1,000 hours

Model	Weight (g)	Diameter (mm)	Length (mm)
9W E27	42	38	115.5
15W E27	70	45	137.5

