



TRIANGULAR BATTEN

Triangular T8 batten provides wide and general distribution of light. It is an architectural interpretation of the twin bare batten by incorporating a refreshing Triangular profile. These fittings are especially suitable for open space illumination as in car parks, walkways & assembly halls.

** Picture shown is for illustration purpose only*

DESCRIPTION

Ordering Model	W (mm)	L (mm)	H (mm)	LED Tube
GTF 220/LED	135	615	70	2 x 2ft
GTF 240/LED	135	1225	70	2 x 4ft
GTF 220/AR/LED	135	615	70	2 x 2ft
GTF 240/AR/LED	135	1225	70	2 x 4ft


* /AR = Aluminium Reflector cover

** /LED/1E = One End (L-N), One End (short circuit) LED tube wiring

** /LED/2E = One End (L), One End (N) LED tube wiring

** /LED/SE = Single End (L-N), another End (open circuit) LED tube wiring

PROFILE

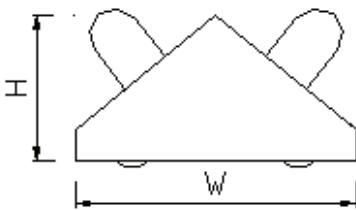

Technical Data

Housing	Heavy gauge sheet steel body with fully welded end-cap
Surface Finishing	White epoxy powder coated & oven baked
Lamp Holder	Polycarbonate housing with Copper plate contact
Wire	Heat resistance 105°C, SIRIM approved material
Connector	UL, VDE safety approved material