

TUNGSRAM™

New LED T8 Start Glass



New LED T8 Start Glass tubular lamps provides an attractive, entry-level alternative to standard Fluorescent T8 lamps. The innovative design delivers impressive light distribution and high efficiency, while at the same time ensuring rapid payback. Available in 2ft and 4ft with 3 different color temperatures.

AFFORDABLE with Long Lasting energy savings!



Application areas



Hospitality



Industrial



Car park



Office

Product Code	Product Description	Wattage (W)	CCT (K)	Lumen (lm)	Efficacy (lm/W)	Pack Qty (PCS)
New LED T8 Start Glass						
93118599	LED T8 SG 0.6m 10W 830 220-240V 1/25 TU DS	10	3000	850	85	1/25
93118600	LED T8 SG 0.6m 10W 840 220-240V 1/25 TU DS	10	4000	900	90	1/25
93118601	LED T8 SG 0.6m 10W 865 220-240V 1/25 TU DS	10	6500	900	90	1/25
93118602	LED T8 SG 1.2m 20W 830 220-240V 1/25 TU DS	20	3000	1750	88	1/25
93118603	LED T8 SG 1.2m 20W 840 220-240V 1/25 TU DS	20	4000	1800	90	1/25
93118604	LED T8 SG 1.2m 20W 865 220-240V 1/25 TU DS	20	6500	1800	90	1/25

Feature & Benefits

- Input 220-240V 50/60Hz
- CRI ≥ 80
- Life Time 15,000 Hours L70
- Wide 180° light distribution
- Switching cycles 15 000
- Starting time < 0.5 sec
- Power factor > 0.5
- Ambient temperature range -20° C to +45°C.
- Color consistency < 6 SDCM
- Visual Comfort – RG0 & Flicker Free




** BEFORE YOU BEGIN

to install the LED T8 tube, please read the entire installation guide carefully.


The English version of the installation instruction and safety information can be found at the following location:

tungram.com/installations

EFFICACY Value: 100 /m/W 

This product has been tested up to 1,000 hours

Dimension (mm)

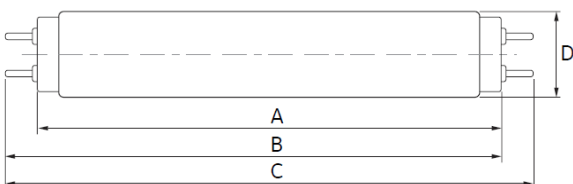

Maximum overall length (mm)	2ft	4ft
A	600	1200
B	597	1207
C	604	1214
D	28	28
Net weight (g)	85	170

