



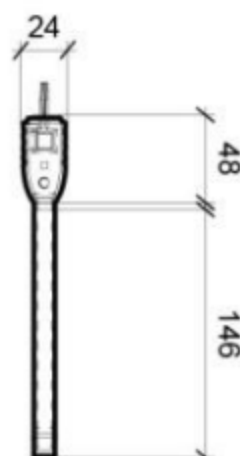

### Dimensions

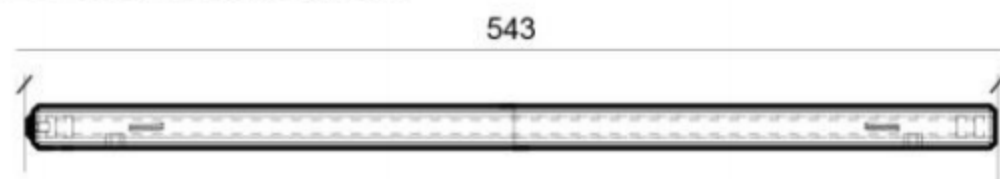

# CKS-2A

## SLIM TYPE

LED Self-Contained Emergency  
**Keluar Sign**

### Technical Information

Mode of Operation :	Maintained
Input Voltage :	240V $\pm$ 10%, 50/60Hz
Battery Type :	3.6V, 1000mAH Nickel-cadmium Battery
Lamp Type :	20pcs LED Class 1, ta-35°C (1.3W)
Operation Temperature :	0°C to 60°C
Charger :	Constant Current
Indication Type :	Red LED "On" Indicates Charging Mode. Push Test-Switch to Simulate Power Failure.
Backup Duration :	3 Hours
Fitting Construction :	Die-cast Aluminum Casing in Frosted Green with Acrylic Plate.
Weight :	$\pm$ 0.9kg
Warranty :	Component - 5 Years Battery - 1 Year <i>(Terms &amp; Condition Apply)</i>
Certified Compliance :	Malaysia Standards MS-983:2004, MS-619-2-22:2005, MS IEC 60598-1:2012, IP20
Certified By :	SIRIM QAS International Sdn. Bhd. Jabatan Bomba dan Penyelamat Malaysia
Application :	Surface Mounting
Dimension :	in mm
Tolerance :	$\pm$ 0.03mm