


CKS-38P

SURFACE TYPE

LED Self-Contained Emergency
Keluar Sign



Dimensions

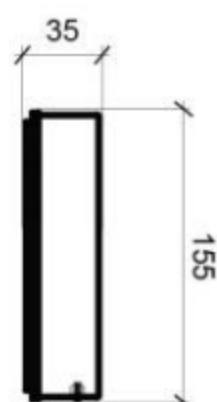

Technical Information

Mode of Operation :	Maintained
Input Voltage :	240V ± 10%, 50/60Hz
Battery Type :	3.2V, 1500mAh, 4.8Wh Environment Friendly Lithium-ion Battery
Lamp Type :	38pcs LED Class 1, ta-35°C
Operation Temperature :	0°C to 60°C
Charger :	Constant Current
Indication Type :	Red LED "On" Indicates Charging Mode. Push Test-Switch to Simulate Power Failure.
Backup Duration :	3 Hours
Fitting Construction :	Injection Moulded Fire- Retardant Polycarbonate Housing with side Knockout Cable Entry. Injection Moulded Fire- Retardant Polycarbonate Diffuser.
Weight :	± 0.65kg
Warranty :	Component - 5 Years Battery - 1 Year <i>(Terms & Condition Apply)</i>
Certified Compliance :	Malaysia Standards MS-983:2004, MS-619-2-22:2005, MS IEC 60598-1:2012, IP20
Certified By :	SIRIM QAS International Sdn. Bhd. Jabatan Bomba dan Penyelamat Malaysia
Application Dimension Tolerance :	Surface Wall Mounting in mm ± 0.03mm