

VEL 250/S



Surface Ceiling / Wall

VEL 250/R



Recessed Plaster Ceiling

Specifications :

Mild Steel Housing
Mild Steel Ressed Frame
Polycarbonate Opal Linear Diffuser
Polycarbonate End Cap

Mounting Method :


Surface Ceiling / Wall /
Recessed Plaster Ceiling
(Cut Out Size L265mm x W85mm)

Certified by :

SIRIM QAS INTERNATIONAL SDN. BHD.
JABATAN BOMBA DAN PENYELAMAT MALAYSIA

Test Standard :

MS 619-2-22:2005
MS IEC 60598-1:2012

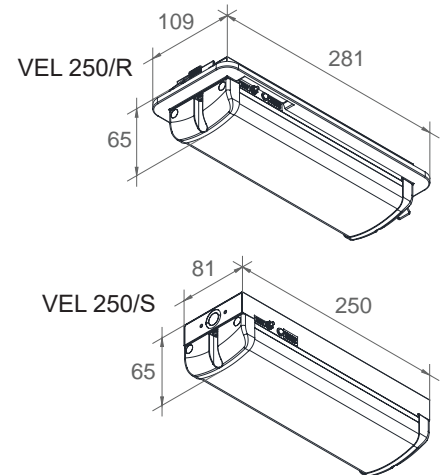

Mains Supply	220 – 240V 50/60Hz	Rating	0.005A / 1W / 0.91 PF
Mode of Operation	Non-Maintained	Rated Lumen Output	62lm
Lamp	LED 2835 (8 PCS)	Classification / Degree of Protection	Class 1 / IP 20
Battery	Ni-Cd AA 2.4V 900mAh	Max. Operating Temperature (ta)	35°C
Emergency Duration	3 Hours	Recommended Mounting Height	Min. 3m
Recharge Period	24 Hours	Weight	VEL 250/S 0.41 KG
			VEL 250/R 0.52 KG