

### VELR 75/R



### VELR 115/R



#### Specifications :

Metal Rim (Matt White)  
 Separate Mild Steel Gear Box (Black)  
 Stainless Steel Spring Clips  
 Polycarbonate Frosted Diffuser

#### Test Standard :


MS 619-2-22:2005  
 MS IEC 60598-1:2012

#### Mounting Method :

Recessed Plaster Ceiling  
 VELR 75 - Hole Cut: D67 mm  
 VELR 115 - Hole Cut: D100 mm

#### Certified by :

SIRIM QAS INTERNATIONAL SDN. BHD.  
 JABATAN BOMBA DAN PENYELAMAT MALAYSIA

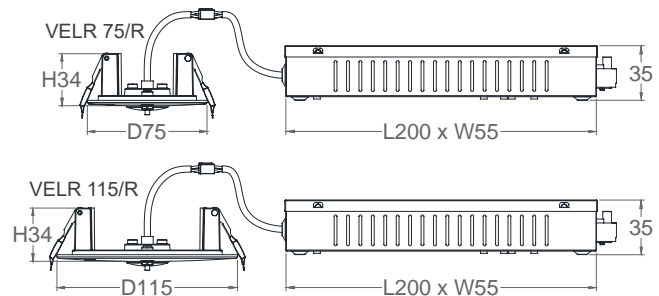

Mains Supply	220 – 240V 50/60Hz	Rating	0.01A / 2.0W / 0.93 PF
Mode of Operation	Non-Maintained	Rated Lumen	115lm
Classification	Class 1	Degree of Protection	IP 20
Battery	Ni-Cd SC 3.6V 1800mAh	Max. Operating Temperature (ta)	35°C
Emergency Duration	3 Hours	Recommended Mounting Height	Min. 3m
Recharge Period	24 Hours	Weight	VELR 75/R
			VELR 115/R
			0.47 KG
			0.48 KG

Packing : 30 sets per carton box  
 Carton box (VELR 75/R) : L476 X W442 X H313 mm ( 16.65 kg )  
 Carton box (VELR 115/R) : L652 X W474 X H313 mm ( 18.50 kg )