

VELR 135/S



Specifications :

Metal Rim (Matt White)
 Polycarbonate Housing
 Mild Steel Mounting Bracket
 Stainless Steel Spring Clips
 Polycarbonate Opal Diffuser

Test Standard :


MS 619-2-22:2005
 MS IEC 60598-1:2012

Mounting Method :

Surface Ceiling Mounted

Certified by :

SIRIM QAS INTERNATIONAL SDN. BHD.
 JABATAN BOMBA DAN PENYELAMAT MALAYSIA

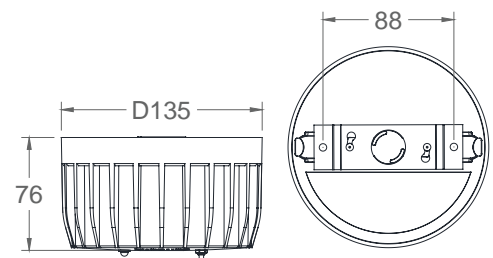

Mains Supply	220 – 240V 50/60Hz	Rating	0.01A / 2.0W / 0.93 PF
Mode of Operation	Non-Maintained	Rated Lumen	115lm
Classification	Class 1	Degree of Protection	IP 20
Battery	Ni-Cd SC 3.6V 1800mAh	Max. Operating Temperature (ta)	35°C
Emergency Duration	3 Hours	Recommended Mounting Height	Min. 3m
Recharge Period	24 Hours	Weight	0.50 KG

Packing : 30 sets per carton box
 Outer carton box : L445 X W300 X H460 mm (17.65 kg)
 Inner carton box : L145 X W140 X H85 mm (0.56 kg)

We reserve the rights to alternate the specification of its product at any time without prior notice.
 Pictures shown are for illustration purpose only.