

### VEL 308/TLS



#### Specifications :

Injection-Molded Polycarbonate Housing  
 Two Fully Adjustable Glare-Free Round Shape Light Heads  
 For Emergency Light  
 Innovative, Snap-Together Design For Fast Installation  
 Easily Removed Mounting Knock-Outs on Back Panel

#### Test Standard :



MS 619-2-22:2005  
 MS IEC 60598-1:2012

#### Mounting Method :

Surface Ceiling / Wall Mounted

#### Certified by :

SIRIM QAS INTERNATIONAL SDN. BHD.  
 JABATAN BOMBA DAN PENYELAMAT MALAYSIA

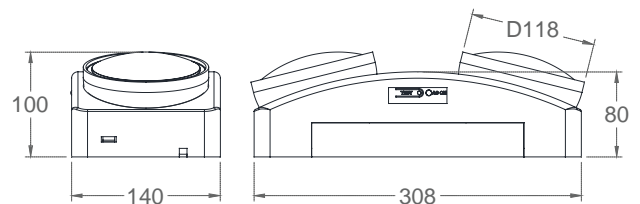

Mains Supply	220 – 240V 50/60Hz	Rating	0.008A / 1.0W / 0.51 PF
Mode of Operation	Non-Maintained	Rated Lumen Output	110lm
Lamp	LED 2 x 6 pieces X 0.2W	Classification / Degree of Protection	Class II / IP 20
Battery	Ni-Cd SC 3.6V 1800mAh	Max. Operating Temperature (ta)	50°C
Emergency Duration	Min. 3 Hours	Recommended Mounting Height	Min. 2.3m
Recharge Period	14 - 16 Hours	Weight	0.93 KG

Packing : 15 sets per carton box  
 Outer carton box : L547 X W465 X H342 mm ( 16.80 kg )  
 Inner carton box : L148 X W105 X H320 mm ( 1.05 kg )

We reserve the rights to alternate the specification of its product at any time without prior notice.  
 Pictures shown are for illustration purpose only.