





Legend	Model
	VKS 560/B/RM
	VKS 560/B/S
	VKS 560/B/L
	VKS 560/B/R



Specifications :

Mild Steel Housing
Opal Diffuser With KELUAR Sign

Test Standard :


MS 983:2004
MS 619-2-22:2005
MS IEC 60598-1:2012

Mounting Method :

Wall Mounted
Above Doors / Entrances & Exits

Certified by :

SIRIM QAS INTERNATIONAL SDN. BHD.
JABATAN BOMBA DAN PENYELAMAT MALAYSIA
JKR Approved

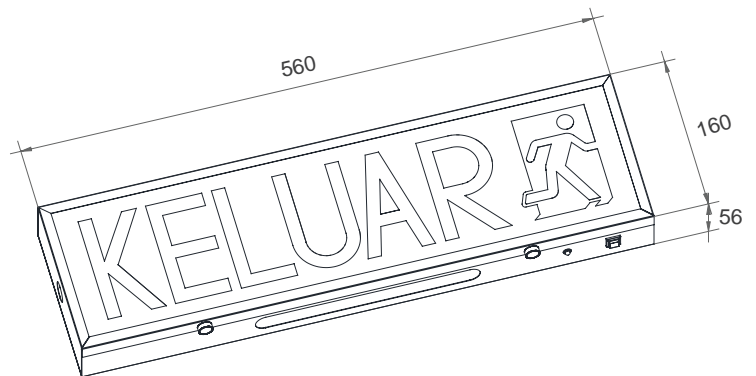

Mains Supply	220 – 240V 50/60Hz	Rating	≤ 0.025A / ≤ 4.5W / 0.79 PF
Mode of Operation	Maintained	Classification	Class 1
Lamp	LED 2835 (14 PCS)	Degree of Protection	IP 20
Battery	Ni-Cd AA 4.8V 1000mAh	Max. Operating Temperature (ta)	35°C
Emergency Duration	3 Hours	Recommended Mounting Height	Min. 2.3m
Recharge Period	14 - 16 Hours	Weight	1.15 KG

Packing : 10 sets per carton box
Outer carton box : L587 X W357 X H370 mm (14.05 kg)
Inner carton box : L572 X W173 X H67 mm (1.30 kg)

We reserve the rights to alternate the specification of its product at any time without prior notice.
Pictures shown are for illustration purpose only.