


LED 2 in 1 Downlight

fonemax[®]
Quality . Reliable . Service

Preview



Preview

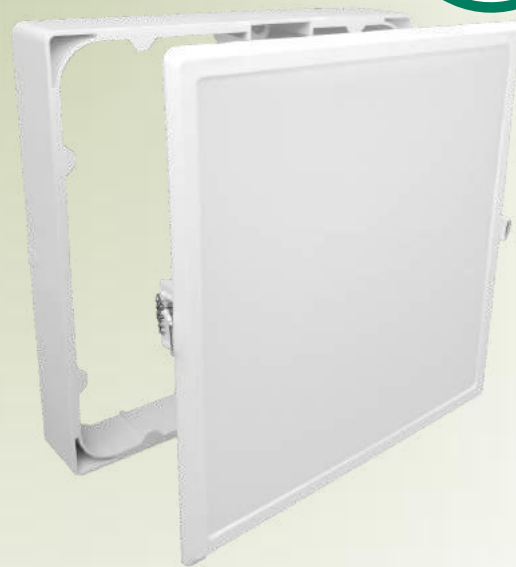

Colour:

LowCarbonHomes
Improving Energy Efficiency



6000K / 4000K / 3300K



AC165-265V/50-60Hz



50,000 Hours

Model	Power (W)	Luminous	Color Rendering Index (CRI)	Power Factor	Beam Angle	Shape	Dimension (mm)	Cut-Out Size (mm)	Weight (kg)
FMS2062R	20W	2160LM	>80	>0.6	120°	Round	Ø166 x 30	Ø150	0.52
FMS2682R	26W	2880LM	>80	>0.6	120°	Round	Ø220 x 30	Ø210	0.54
FMS2062S	20W	2160LM	>80	>0.6	120°	Square	166 x 166 x 30	150 x 150	0.52
FMS2682S	26W	2880LM	>80	>0.6	120°	Square	220 x 220 x 30	210 x 210	0.54



Application

