





Legend	Model
	VKS 555/STS/RM (Single Sided View)
	VKS 555/STS/SA (Single Sided View)
	VKS 555/STS/LRA (Double Sided View)
	



Specifications :


Aluminium Extruded Housing
Mild Steel Mounting Base
Polycarbonate Diffuser Panel With KELUAR Sign

Mounting Method :

Surface Ceiling Mounted

Certified by :

SIRIM QAS INTERNATIONAL SDN. BHD.
JABATAN BOMBA DAN PENYELAMAT MALAYSIA

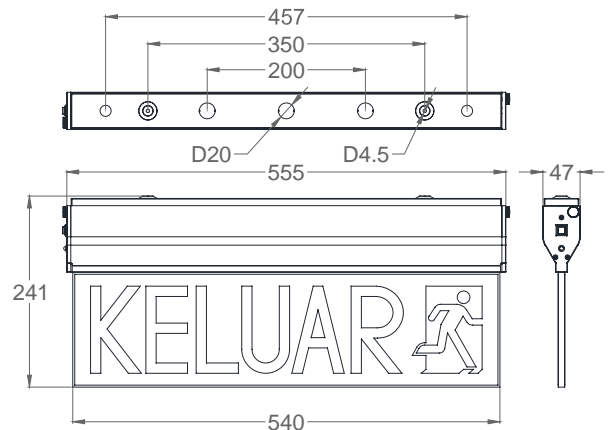

Mains Supply	220 – 240V 50/60Hz	Rating	0.01A / 2.7W / 0.85 PF
Mode of Operation	Maintained	Classification	Class 1
Lamp	LED 2835 (28 PCS)	Degree of Protection	IP 20
Battery	Ni-Cd AA 3.6V 900mAh	Max. Operating Temperature (ta)	40°C
Emergency Duration	3 Hours	Recommended Mounting Height	Min. 2.3m
Recharge Period	24 Hours	Weight	1.85 KG

Packing : 10 sets per carton box
Outer carton box : L643 X W462 X H522 mm (22.95 kg)
Inner carton box : L628 X W88 X H248 mm (2.18 kg)

We reserve the rights to alternate the specification of its product at any time without prior notice.
Pictures shown are for illustration purpose only.