

Legend	Model
	VES 300/PC/E (Single Sided View)
 	VES 300/PC/ELRA (Double Sided View)
	VES 300/PC/RM (Single Sided View)
 	VES 300/PC/RMLRA (Double Sided View)



Specifications :

Polycarbonate Housing
Polycarbonate Diffuser

Test According to :

SS 563
SS IEC 60598-2-22


Mounting Method :

- Ceiling
- Wall

Optional :



Wall Bracket

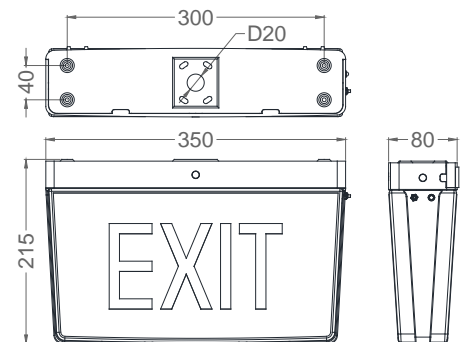

Mains Supply	220 – 240V 50/60Hz	Rating	0.01A / 3.2W / 0.95 PF
Mode of Operation	Maintained	Classification	Class II
Lamp	LED 2835 (8 PCS)	Degree of Protection	IP 20
Battery	Ni-Cd AA 3.6V 900mAh	Max. Operating Temperature (ta)	40°C
Emergency Duration	2 Hours	Recommended Mounting Height	Min. 2.3m
Recharge Period	24 Hours	Weight	0.99 KG

Packing : 15 sets per carton box
Outer carton box : L690 X W372 X H475 mm (18.20 kg)
Inner carton box : L355 X W90 X H220 mm (1.12 kg)