

Legend	Model
	VES 350/B/E
	VES 350/B/EL
	VES 350/B/ER



Specifications :


Mild Steel Housing
Polycarbonated Diffuser

Test According to :

SS 563
SS IEC 60598-2-22

Mounting Method :

Wall Mounted
Above Doors / Entrances & Exits

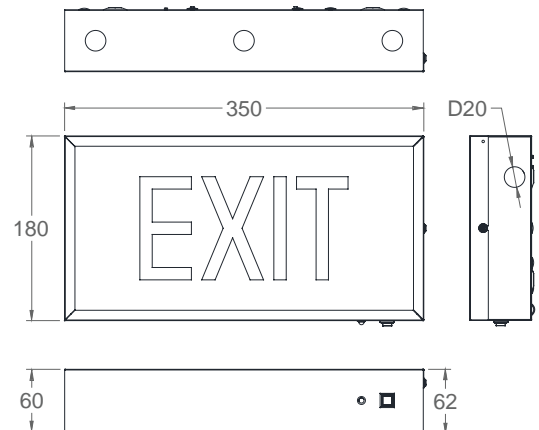

Mains Supply	220 – 240V 50/60Hz	Rating	0.01A / 3.15W / 0.95 PF
Mode of Operation	Maintained	Classification	Class 1
Lamp	LED 2835 (3 PCS)	Degree of Protection	IP 20
Battery	Ni-Cd AA 3.6V 900mAh	Max. Operating Temperature (ta)	40°C
Emergency Duration	2 Hours	Recommended Mounting Height	Min. 2.3m
Recharge Period	24 Hours	Weight	0.82 KG

Packing : 15 sets per carton box
Outer carton box : L564 X W352 X H383 mm (15.20 kg)
Inner carton box : L362 X W182 X H65 mm (0.93 kg)

We reserve the rights to alternate the specification of its product at any time without prior notice.
Pictures shown are for illustration purpose only.