


LED SMD Flood Light Outdoor

fonemax[®]
Quality . Reliable . Service



Preview

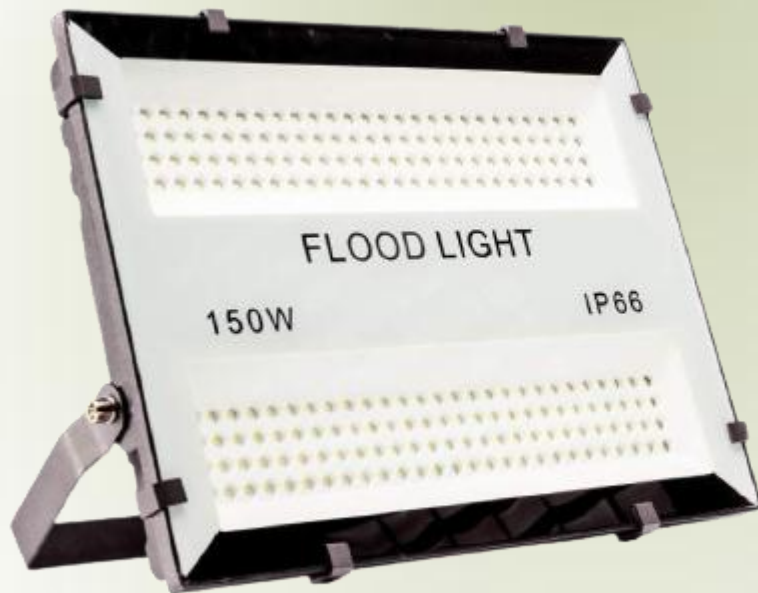

Colour:



LowCarbonHomes
Improving Energy Efficiency



energy saving



Daylight 6500K /
Warm White 3300K



AC90-265V
/50-60Hz



50,000
Hours



IP66

| Model | Power (W) | Luminous | Input Voltage | Color Rendering Index (CRI) | Power Factor | Beam Angle | Dimension (mm) | Weight (kg) |
|--------|-----------|----------|---------------|-----------------------------|--------------|------------|----------------|-------------|
| FFW30 | 30W | 2850LM | AC90-265V | >80 | >0.95 | 120° | 178 x 178 x 34 | 0.8 |
| FFW50 | 50W | 4750LM | AC90-265V | >80 | >0.95 | 120° | 205 x 194 x 35 | 1 |
| FFW100 | 100W | 9500LM | AC90-265V | >80 | >0.95 | 120° | 274 x 204 x 39 | 1.6 |
| FFW150 | 150W | 14,250LM | AC90-265V | >80 | >0.95 | 120° | 340 x 259 x 44 | 2.3 |
| FFW200 | 200W | 19,000LM | AC90-265V | >80 | >0.95 | 120° | 390 x 295 x 44 | 3.2 |
| FFW300 | 300W | 28,500LM | AC90-265V | >80 | >0.95 | 120° | 490 x 343 x 50 | 4.8 |
| | 400W | | | | | | | |



Application

Billboard



Construction



Exhibition



Facade



Factory



Fair



Garden



Manufacturing



Sport Area



Warehouse



Monument



Port & Dock

