

Input Voltage :

AC 220-240V, 50/60Hz

Lifespan :

Up to 50000 Hours (at ta 45°C)

Protection :

Fast Transient / Brust /Surge Immunity : L-N: 2KV; L/N-PE: 4KV

Humidity : 85%

Protection - SCP / OLP / OVP : Yes, Auto Restart

Protection - no load protection : Yes

SELV : Yes

Test Standard :


IEC 61347-1:2015

IEC 61347-1-2015/AMD1:2017

IEC 61347-2-13:2014

IEC 61347-2-13:2014/AMD1:2016

IEC 62384:2006, AMD1:2009

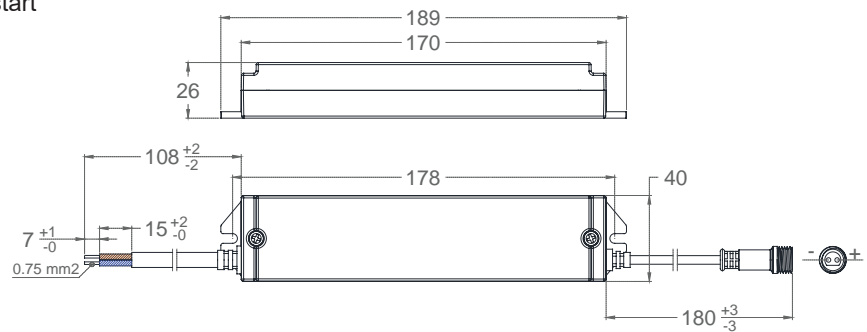

| Model | Output Current | Forward Voltage | Output Power | Power Factor | Efficiency | THD | Max. Temperature (tc / ta) | Dimension |
|---------------|----------------|-----------------|--------------|--------------|------------|-------|----------------------------|-----------|
| | | | | | | | | (mm) |
| ViD 12/350/27 | 350mA | 15 - 27V | 10W | ≥ 0.91 | ≥ 80% | ≤ 15% | 75°C / 45°C | As Shown |
| ViD 20/700/25 | 700mA | 15 - 25V | 18W | ≥ 0.91 | ≥ 80% | ≤ 15% | 75°C / 45°C | As Shown |