

Input Voltage :

AC 220-240V, 50/60Hz

Lifespan :

Up to 50000 Hours (at ta 45°C)

Protection :

Fast Transient / Burst / Surge Immunity : L-N: 2KV; L/N-PE: 4KV

Humidity : 85%

Protection - SCP / OLP / OVP : Yes, Auto Restart

Protection - no load protection : Yes

SELV : Yes

Test Standard :

IEC 61347-1:2015

IEC 61347-1-2015/AMD1:2017

IEC 61347-2-13:2014


IEC 61347-2-13:2014/AMD1:2016

IEC 62384:2006, AMD1:2009

Dimming Periphery Component :

0-10V Dimmable Controller or

Resistor Dimmable Controller

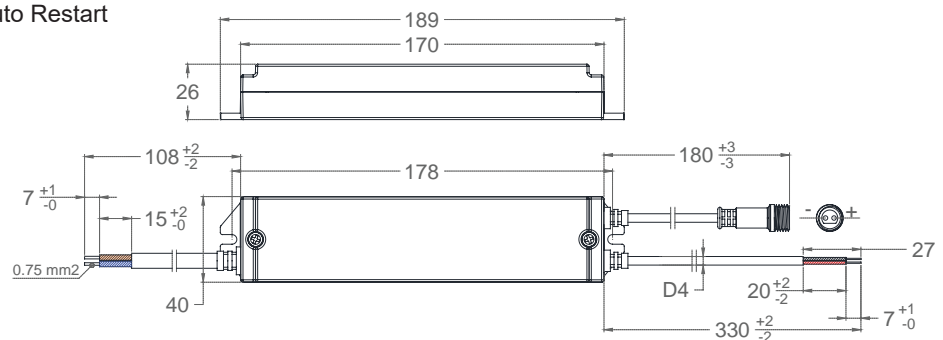

Model	Output Current	Forward Voltage	Output Power	Power Factor	Efficiency	THD	Max. Temperature (tc / ta)	Dimension
								(mm)
ViD 12/350/27/0-10V	350mA	15 - 27V	10W	≥ 0.91	≥ 80%	≤ 15%	75°C / 45°C	As Shown
ViD 20/700/25/0-10V	700mA	15 - 25V	18W	≥ 0.91	≥ 80%	≤ 15%	75°C / 45°C	As Shown