


S8019

220 - 240V 50 / 60Hz E40

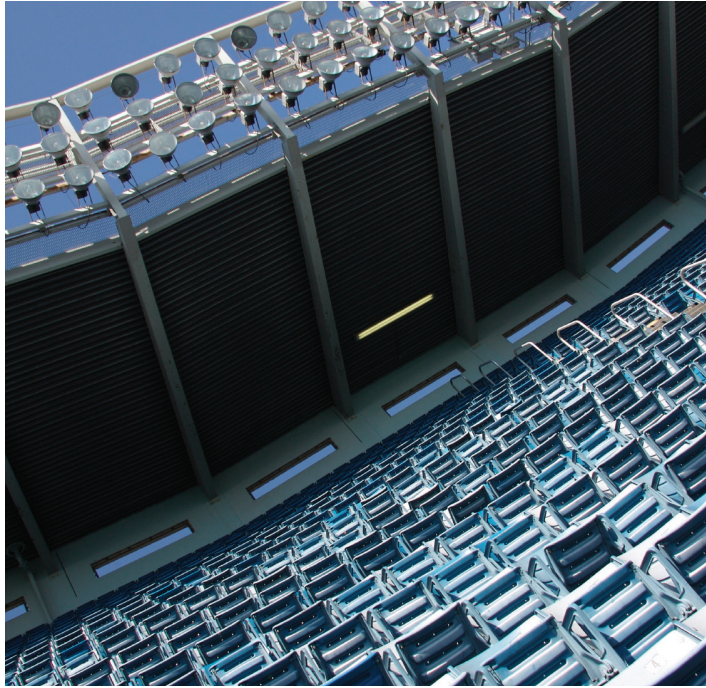

features

body / lamp holder compartment

- body lamp holder compartment is made from die-cast aluminium and powder coated with Akzo Nobel Interpon for protection

high performance reflector

- single piece high purity deep draw aluminium reflector is sealed with silicon gasket over heat resistant tempered glass provide a watertight seal

glass

- fixed thermal resistant tempered glass

mounting bracket

- steel mounting bracket coated with epoxy powder attached with angle adjuster & indicator

rear cover

- easy access to the lamp from the rear cover of the fitting

lamp holder

- E40 lamp holder conforming to EN / VDE standard

technical data

ingress protection • IP66 (lamp fitting)

voltage • 220 - 240 Vac 50 / 60Hz


lamp wattage • MH 2000W

holder type • E40


floodlight maximum weight • 12 kg

control gear weight • 19.5 kg

dimension

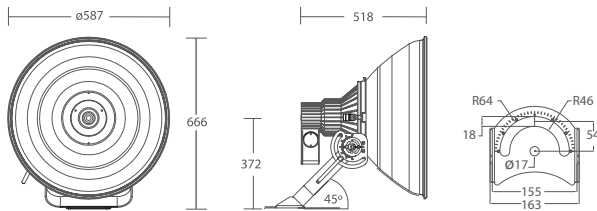

photometric curve

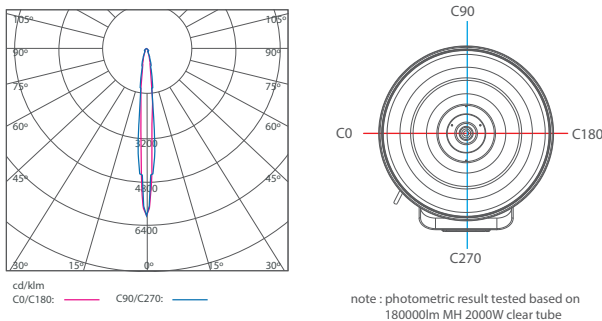


order code

model	lamp type	lamp holder	carton dimension (L x W x H) mm	order code
S8019 MH 2000W	tubular	E40	640 x 650 x 575	S8019-M2000
accessories	housing material	IP rated		order code
remote control gear (MH 2000W)	die-cast aluminium	IP65		S5200 UA-M2000

note: Due to rapid change and continuous improvement in technology, all specifications are subject to change without prior notice to improve reliability, function or design in order to supply the best product possible.

accessories

S5200-UA

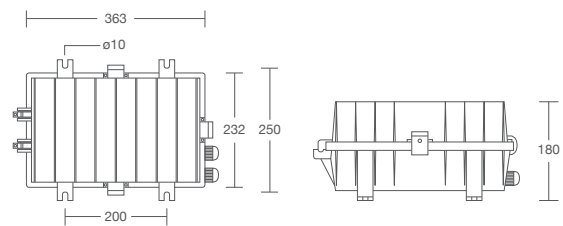

key for standard order coding

S8019	-	M	2000	capacity code	: example = 2000W
				lamp type	: S = high pressure sodium : M = metal halide
				casing model	