



LED HIGH BAY IP65 WITH HIGH SURGE PROTECTION

<< EVOLUTION SERIES >>



APPLICATION

- Ideal for Warehouse Lighting, Factory Lighting, Stadium Lighting.




FEATURES

- High Brightness and Long Life LED Chips (35,000Hrs).
- Operating Temp. -20° C ~ 50° C.
- Aluminium Die-Casting Housing.
- Double Surge Protection (Internal SPD 4KV + External SPD 10KV).
- Natural Convection Cooling Design (Fanless Structure).
IP65 rating fully dust tight & protected against solid objects.
(Suitable for cool-room and oily base environment).



<< INTERNAL SPD 4KV + 10KV

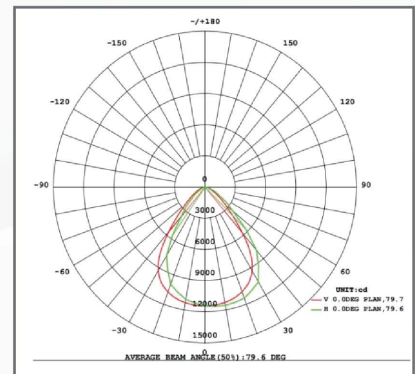

Luminous Intensity Distribution Diagram



MODEL	POWER (W)	CCT (KT)	LUMEN (LM)	SIZE Ø x H (mm)	NET WEIGHT (Kg)	PACKING
BSHB03-100	100W	6500	11000	300 x 125	1.35	4/CTN
BSHB03-150	150W	6500	19500	350 x 125	1.95	4/CTN
BSHB03-200	200W	6500	26000	400 x 125	2.55	4/CTN

