

Model: **BE1ST 12L-S**



Glow In The Dark



Input Supply	220 - 240V 50/60Hz	Rating	$\leq 0.02A / \leq 2.4W / \leq 0.45 PF$
Mode of Operation	Non-Maintained	Classification	Class II
Lamp	LED 10 pieces X 0.2W	Degree of Protection	IP 20
Battery	Ni-Cd AA 3.6V 1000mAh	Max. Operating Temperature (Ta)	35°C
Emergency Duration	Min. 3 Hours	Recommended Mounting Height	Min. 2.3m
Recharge Period	24 Hours	Weight	$\approx 0.35 KG$

Construction **Acrylic Housing with Acrylic diffuser**  
Test Standard **MS 619-2-22:2005**  
**MS IEC 60598-1:2012**  
CERTIFIED BY **SIRIM QAS INTERNATIONAL SDN. BHD.**  
**JABATAN BOMBA DAN PENYELAMAT MALAYSIA**



**TOP VIEW**


Dimension in **mm**  
Tolerance :  **$\pm 0.03mm$**

**Surface Mounting**



**FRONT VIEW**

**SIDE VIEW**

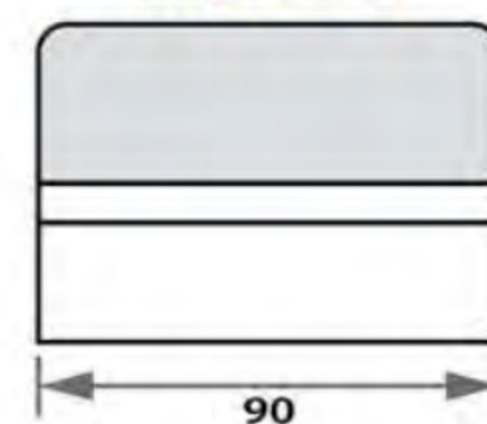

90