


Model: **KEL 12L-44P**



|                    |                       |                                 |   |
|--------------------|-----------------------|---------------------------------|---|
| Input Supply       | 220 - 240V 50/60Hz    | Rating                          | $\leq 0.02A / \leq 2.4W / \leq 0.45 PF$ |
| Mode of Operation  | Non-Maintained        | Classification                  | Class II                                |
| Lamp               | LED 12 pieces X 1.5W  | Degree of Protection            | IP 20                                   |
| Battery            | Ni-Cd AA 3.6V 1000mAh | Max. Operating Temperature (Ta) | 35°C                                    |
| Emergency Duration | Min. 3 Hours          | Recommended Mounting Height     | Min. 2.3m                               |
| Recharge Period    | 24 Hours              | Weight                          | $\approx 0.35 KG$                       |

Construction **Acrylic Housing with Acrylic diffuser**  
Test Standard **MS 619-2-22:2005**  
**MS IEC 60598-1:2012**  
CERTIFIED BY **SIRIM QAS INTERNATIONAL SDN. BHD.**  
**JABATAN BOMBA DAN PENYELAMAT MALAYSIA**

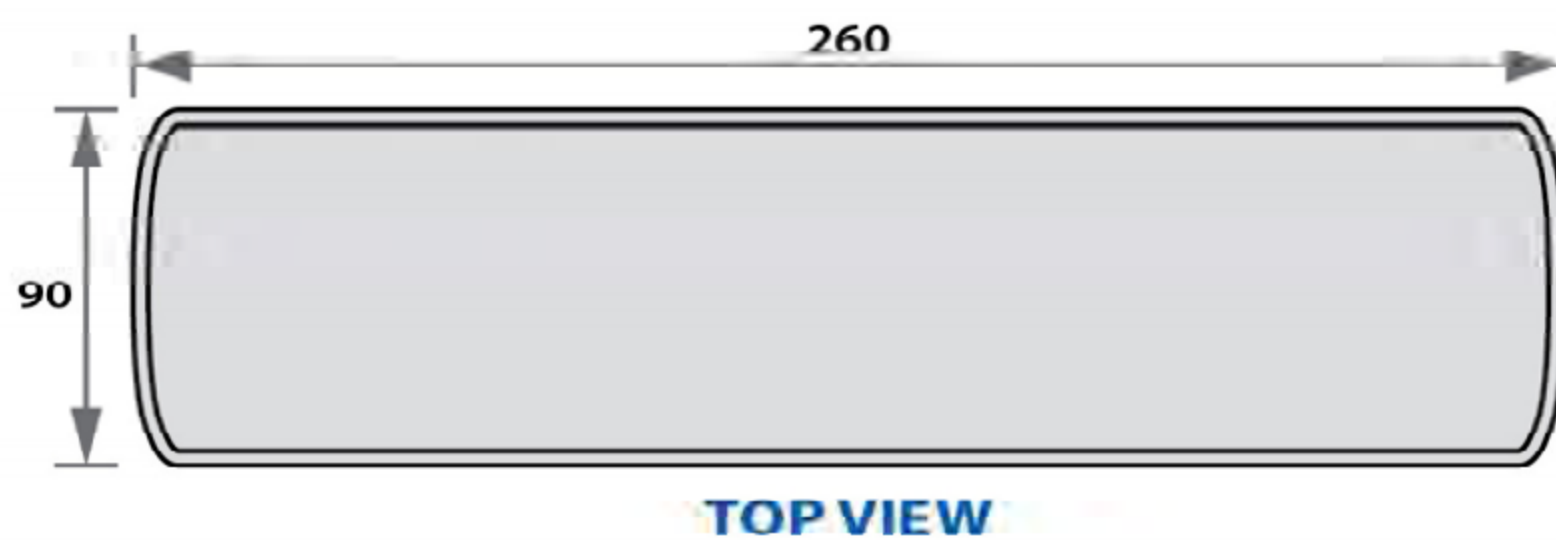

Dimension in **mm**  
Tolerance :  **$\pm 0.03mm$**

**Surface Mounting**

