

Model : **BE1ST 20L-R**



Glow In The Dark




Input Supply	220 - 240V 50/60Hz	Rating	$\leq 0.02A / \leq 2.4W / \leq 0.45 PF$
Mode of Operation	Non-Maintained	Classification	Class I
Lamp	LED 10 pieces X 0.2W	Degree of Protection	IP 20
Battery	Ni-Cd AA 3.6V 1000mAh	Max. Operating Temperature (Ta)	35°C
Emergency Duration	Min. 3 Hours	Recommended Mounting Height	Min. 2.3m
Recharge Period	24 Hours	Weight	$\approx 1.6 KG$

Construction **Electro-galvanised Sheet Steel Casing with Epoxy Powder Coated**

Test Standard **MS 619-2-22:2005
MS IEC 60598-1:2012**


CERTIFIED BY **SIRIM QAS INTERNATIONAL SDN. BHD.
JABATAN BOMBA DAN PENYELAMAT MALAYSIA**

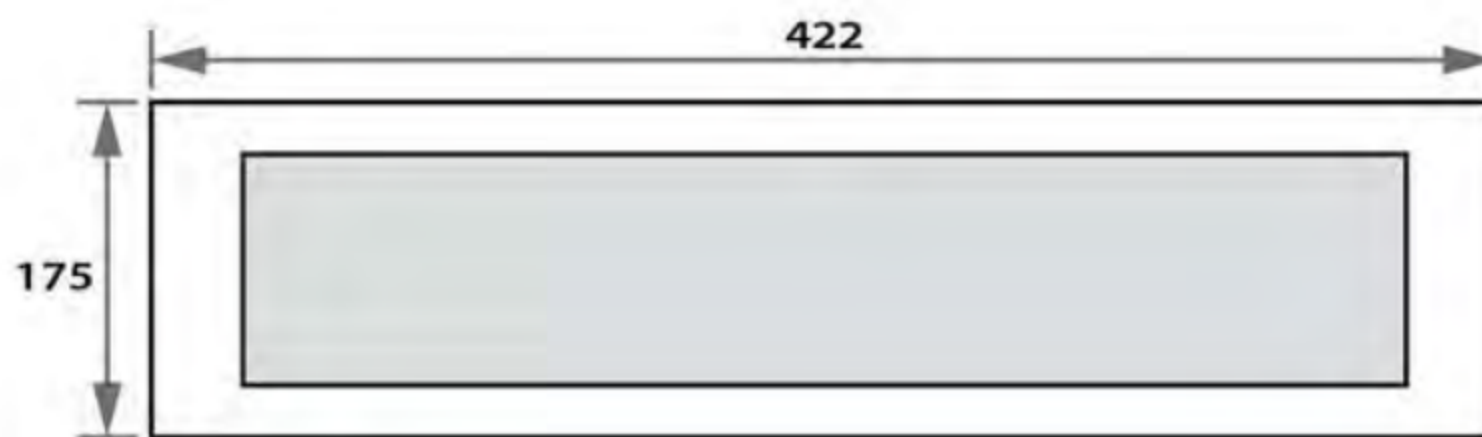


TOP VIEW

Dimension in **mm**
Tolerance : $\pm 0.03mm$

Recessed Mounting

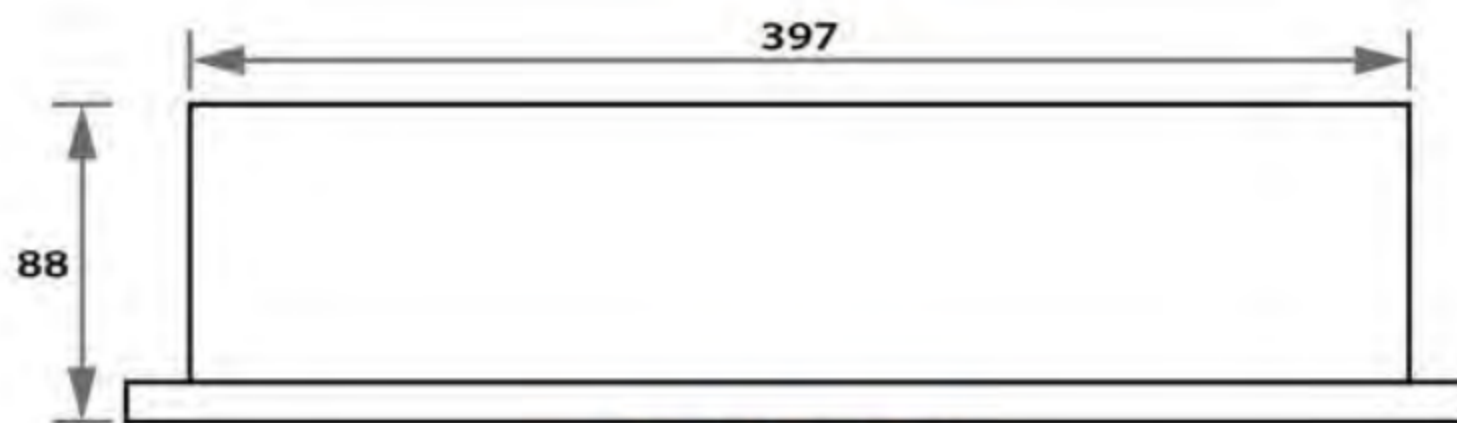

FRONT VIEW

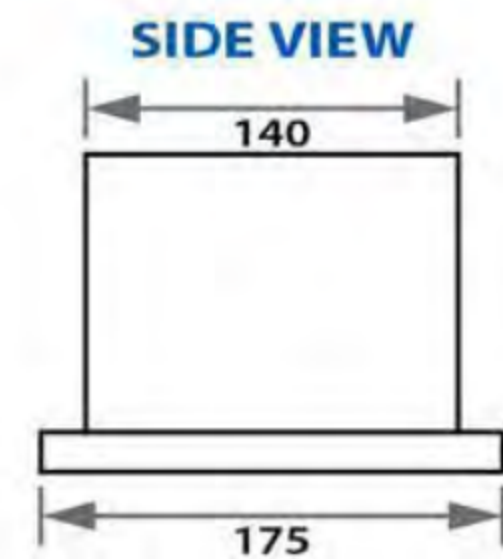

SIDE VIEW