



Model: **BE1ST 101B**
(Single Sided View)



Model: **BE1ST 101B-S**
(Single Sided View)



Model: **BE1ST 101B-L**
(Single Sided View)



Model: **BE1ST 101B-R**
(Single Sided View)



Input Supply	220 - 240V 50/60Hz
Mode of Operation	Maintained
Lamp	LED 20 pieces X 0.2W
Battery	Ni-Cd AA 4.8V 1000mAh
Emergency Duration	Min. 3 Hours
Recharge Period	24 Hours

Rating	≤ 0.04A / ≤ 5W / ≤ 0.45 PF
Classification	Class I
Degree of Protection	IP 20
Max. Operating Temperature (Ta)	35°C
Recommended Mounting Height	Min. 2.3m
Weight	± 1.5 KG

Construction: **Electro-galvanised Sheet Steel Casing with Epoxy Powder Coated**

Test Standard: **MS 983:2004
MS 619-2-22:2005
MS IEC 60598-1:2012**

CERTIFIED BY: **SIRIM QAS INTERNATIONAL SDN. BHD.
JABATAN BOMBA DAN PENYELAMAT MALAYSIA**

Dimension in **mm**
Tolerance : **±0.03mm**


Wall Mounting



FRONT VIEW



BOTTOM VIEW

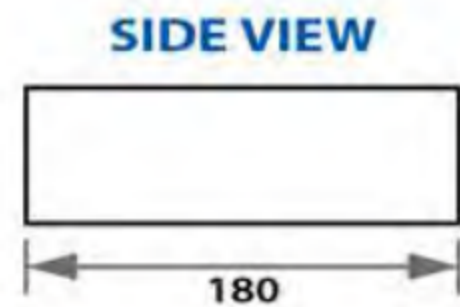

SIDE VIEW