


Model: **KES SEL 101-D**  
(Double Sided View)



Model: **KES SEL 101D-S**  
(Double Sided View)

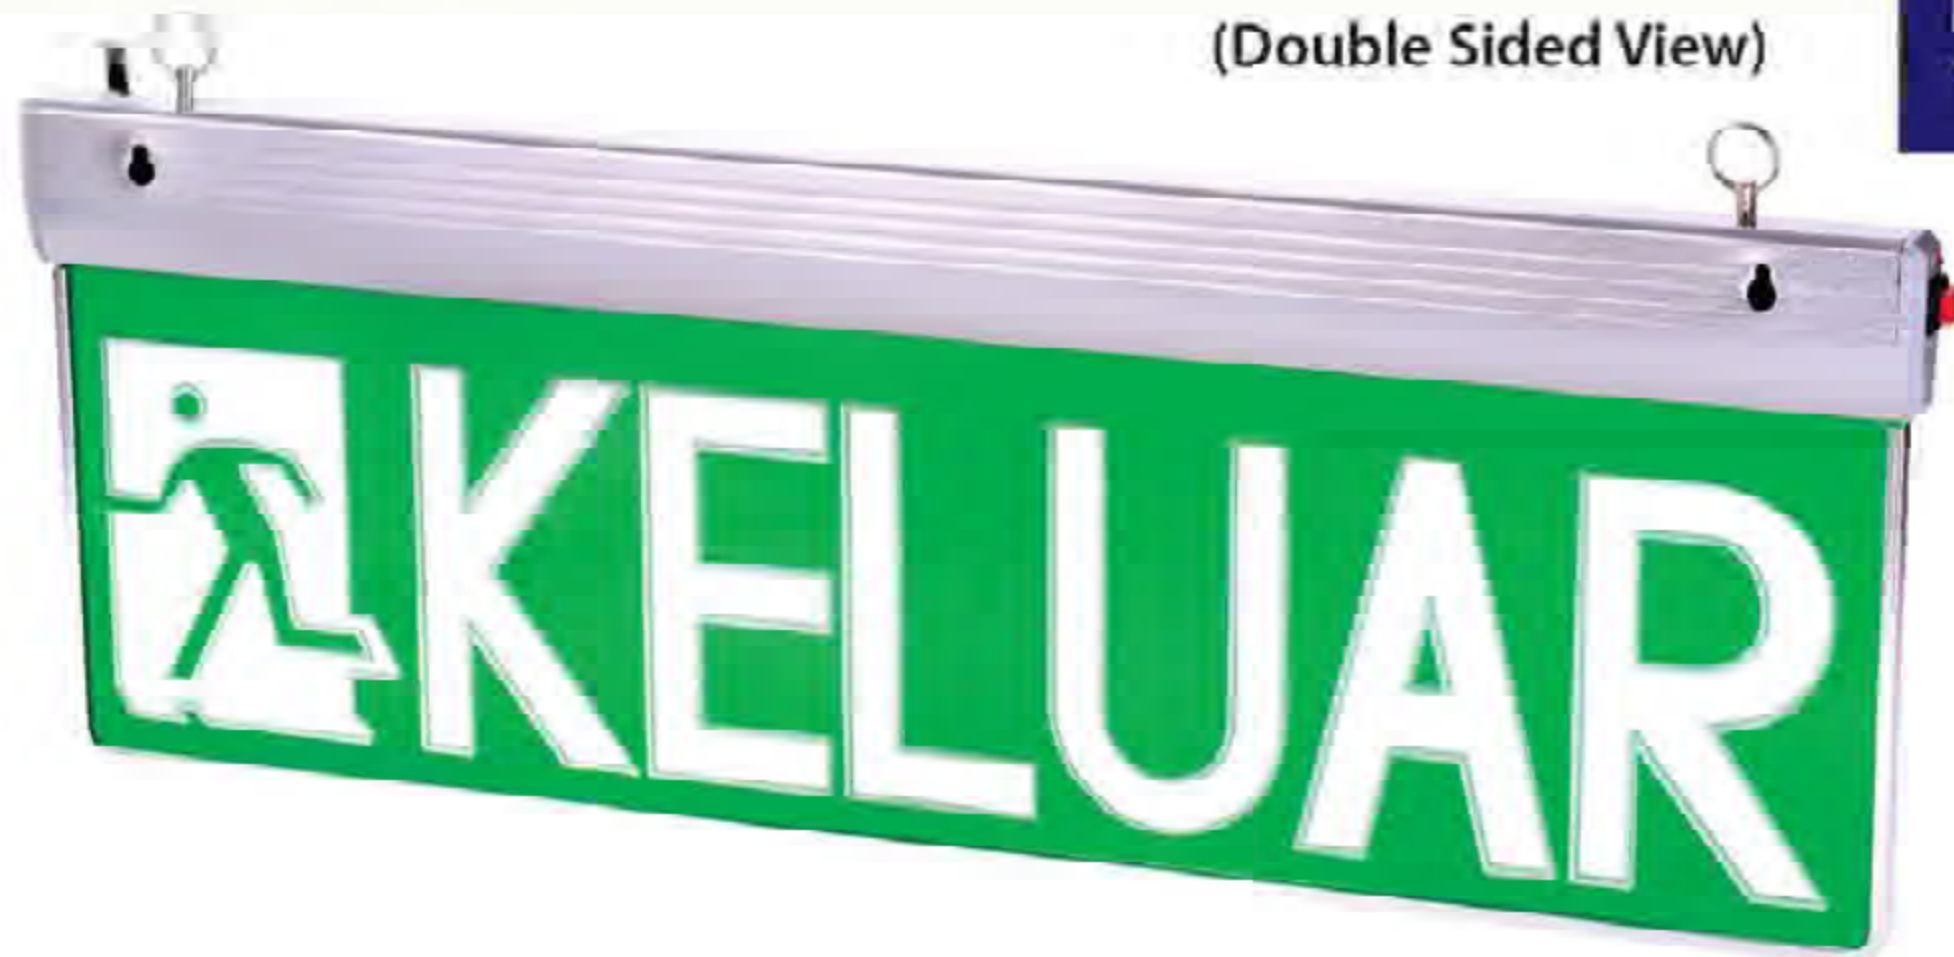

Model: **KES SEL 101D-L**  
(Double Sided View)



Model: **KES SEL 101D-R**  
(Double Sided View)



Input Supply	220 - 240V 50/60Hz	Rating	$\leq 0.04A / \leq 5W / \leq 0.65 PF$
Mode of Operation	Maintained	Classification	Class I
Lamp	LED 12 pieces X 0.2W	Degree of Protection	IP 20
Battery	NI-Cd AA 4.8V 1000mAh	Max. Operating Temperature (Ta)	35°C
Emergency Duration	Min. 3 Hours	Recommended Mounting Height	Min. 2.3m
Recharge Period	24 Hours	Weight	$\approx 0.9 KG$

Construction: Electro-galvanised Sheet Steel Casing with Epoxy Powder Coated

Test Standard: MS 983:2004  
MS 619-2-22:2005  
MS IEC 60598-1:2012

CERTIFIED BY: SIRIM QAS INTERNATIONAL SDN. BHD.  
JABATAN BOMBA DAN PENYELAMAT MALAYSIA

Dimension in **mm**  
Tolerance:  $\pm 0.03mm$

**Wall Mounting**

