

CLEAN ROOM FITTING

For production in special environment conditions, Clear Room Fitting are specially designed to meet such demanding manufacturing requirements through the emphasis on high rigidity constructions and meticulous fabrication workmanship.

Application includes pharmaceutical places, food processing industries, precision engineering and semiconductor assembly plants.

** Picture shown is for illustration purpose only*

DESCRIPTION

Ordering Model	W (mm)	L1/L2 (mm)	H (mm)	LED Tube
GAC 1202/CR/LED	200	598 / 615	120	1 x 2ft
GAC 2212/CR/LED	298	598 / 615	120	2 x 2ft
GAC 2222/CR/LED	603	598 / 615	120	2 x 2ft
GAC 3222/CR/LED	603	598 / 615	120	3 x 2ft
GAC 4222/CR/LED	603	598 / 615	120	4 x 2ft
GAC 1414/CR/LED	298	1208 / 1225	120	1 x 4ft
GAC 2414/CR/LED	298	1208 / 1225	120	2 x 4ft
GAC 2424/CR/LED	603	1208 / 1225	120	2 x 4ft
GAC 3424/CR/LED	603	1208 / 1225	120	3 x 4ft
GAC 4424/CR/LED	603	1208 / 1225	120	4 x 4ft


* Customised dimensions available upon request, exp: /SU, /RE, /MM

** /LED/1E = One End (L-N), One End (short circuit) LED tube wiring

** /LED/2E = One End (L), One End (N) LED tube wiring

** /LED/SE = Single End (L-N), another End (open circuit) LED tube wiring

PROFILE

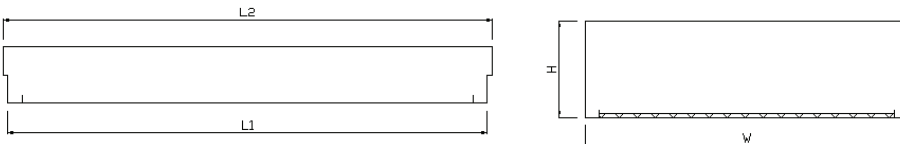

Technical Data

Housing	Heavy gauge sheet steel body & IP54 rated
Optical	Prismatic diffuser (other options available)
Surface Finishing	White epoxy powder coated & oven baked
Lamp Holder	Polycarbonate housing with Copper plate contact
Wire	Heat resistance 105°C, SIRIM approved material
Connector	UL, VDE safety approved material