

LE-213 & LE-213 R

SLIMLINE DESIGN FOR ELEGANT LOOK

SELF-CONTAINED EMERGENCY
KELUAR SIGN




Technical Data

Mode of Operation	: Maintained
Input Voltage	: 240V±10%, 50 Hz
Battery	: Hi-Temp. Nickel Cadmium Battery.
Charging Current	: 50mA (Nominal)
Lamp Used	: 10 x SMD LED.
Operating Temperature	: 0°C to 60°C
Charger	: Fully Automatic Constant Current. Solid-State Electronics Provide High Reliability with Trickle Charge-Facility.
Indication	: Red L.E.D. "On" Indicates Charging Equipped with Push Test-Switch to Simulate Power Failure.
Backup Time	: 3 Hours Duration.
Construction	: Elector-Galvanised Steel Casing of High Reflectance Finished with Corrosion Resistant Epoxy Spray Coating.
Weight	: LE-213 \approx 1.6kg / LE-213 R \approx 1.8kg
#Warranty	: 5 Years
Compliance	: Malaysia Standards MS-983, IP-20.
Protection	: Low-Voltage Cut-Off to Prevent Over-Discharge of Battery.

Dimension in mm Tolerance: ± 0.03

Wall Mounting

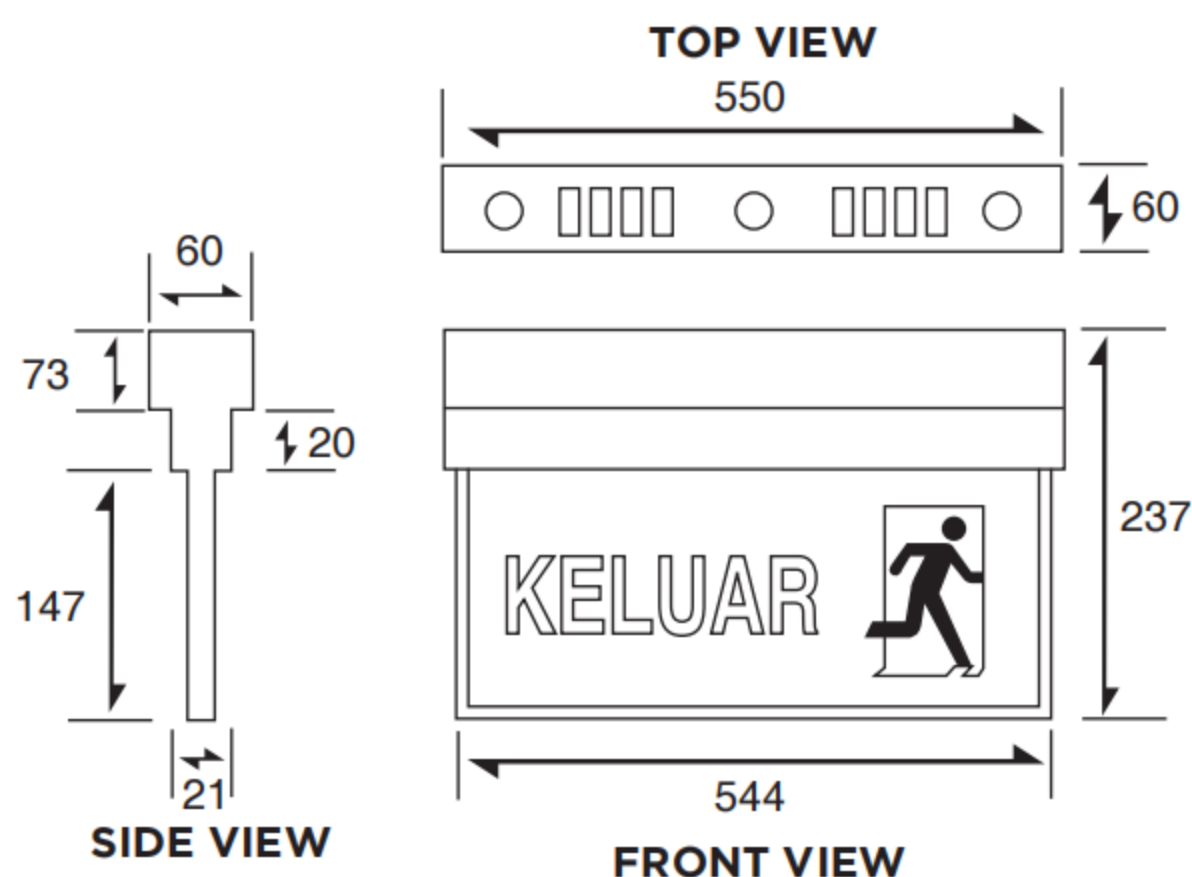

Recessed Mounting

