



Solar LED Street Light 400W & 600W with Monocrystalline Silicon Solar Panel



APPLICATION

Parking Areas, Stadiums, Pathway, Garden,
Commercial and Residential Areas.




FEATURES

- Easy to install, no complicated wiring required.
- Solar charging.
- Charging time 4 - 8 hours.
- Working time 10 - 12 hours.
- There is a light indicating the remaining battery.
- Remote control adjust the brightness as needed remote control distance of 10 meters.
- The remote can set the timer to turn off automatically, there are 3 hours, 5 hours.
- IP67 waterproof and rainproof.
- Recommended installation height 4m-6m for 400W; 5m-7m for 600W



LUMINAIRE SPECIFICATION

- Color Temperature : 6500K Day Light
- Color Rendering Index : ≥ 70
- Lifetime : 30,000Hrs
- Beam Angle : $140^{\circ} \times 70^{\circ}$
- Voltage : DC 3.2V
- Working Environment : $-10^{\circ}\text{C} \sim 40^{\circ}\text{C}$
- Material : Cast Iron + PC
- Battery Type : Lithium-ion
- Recommended installation height : 4m - 6 m (400W)
5m - 7m (600W)

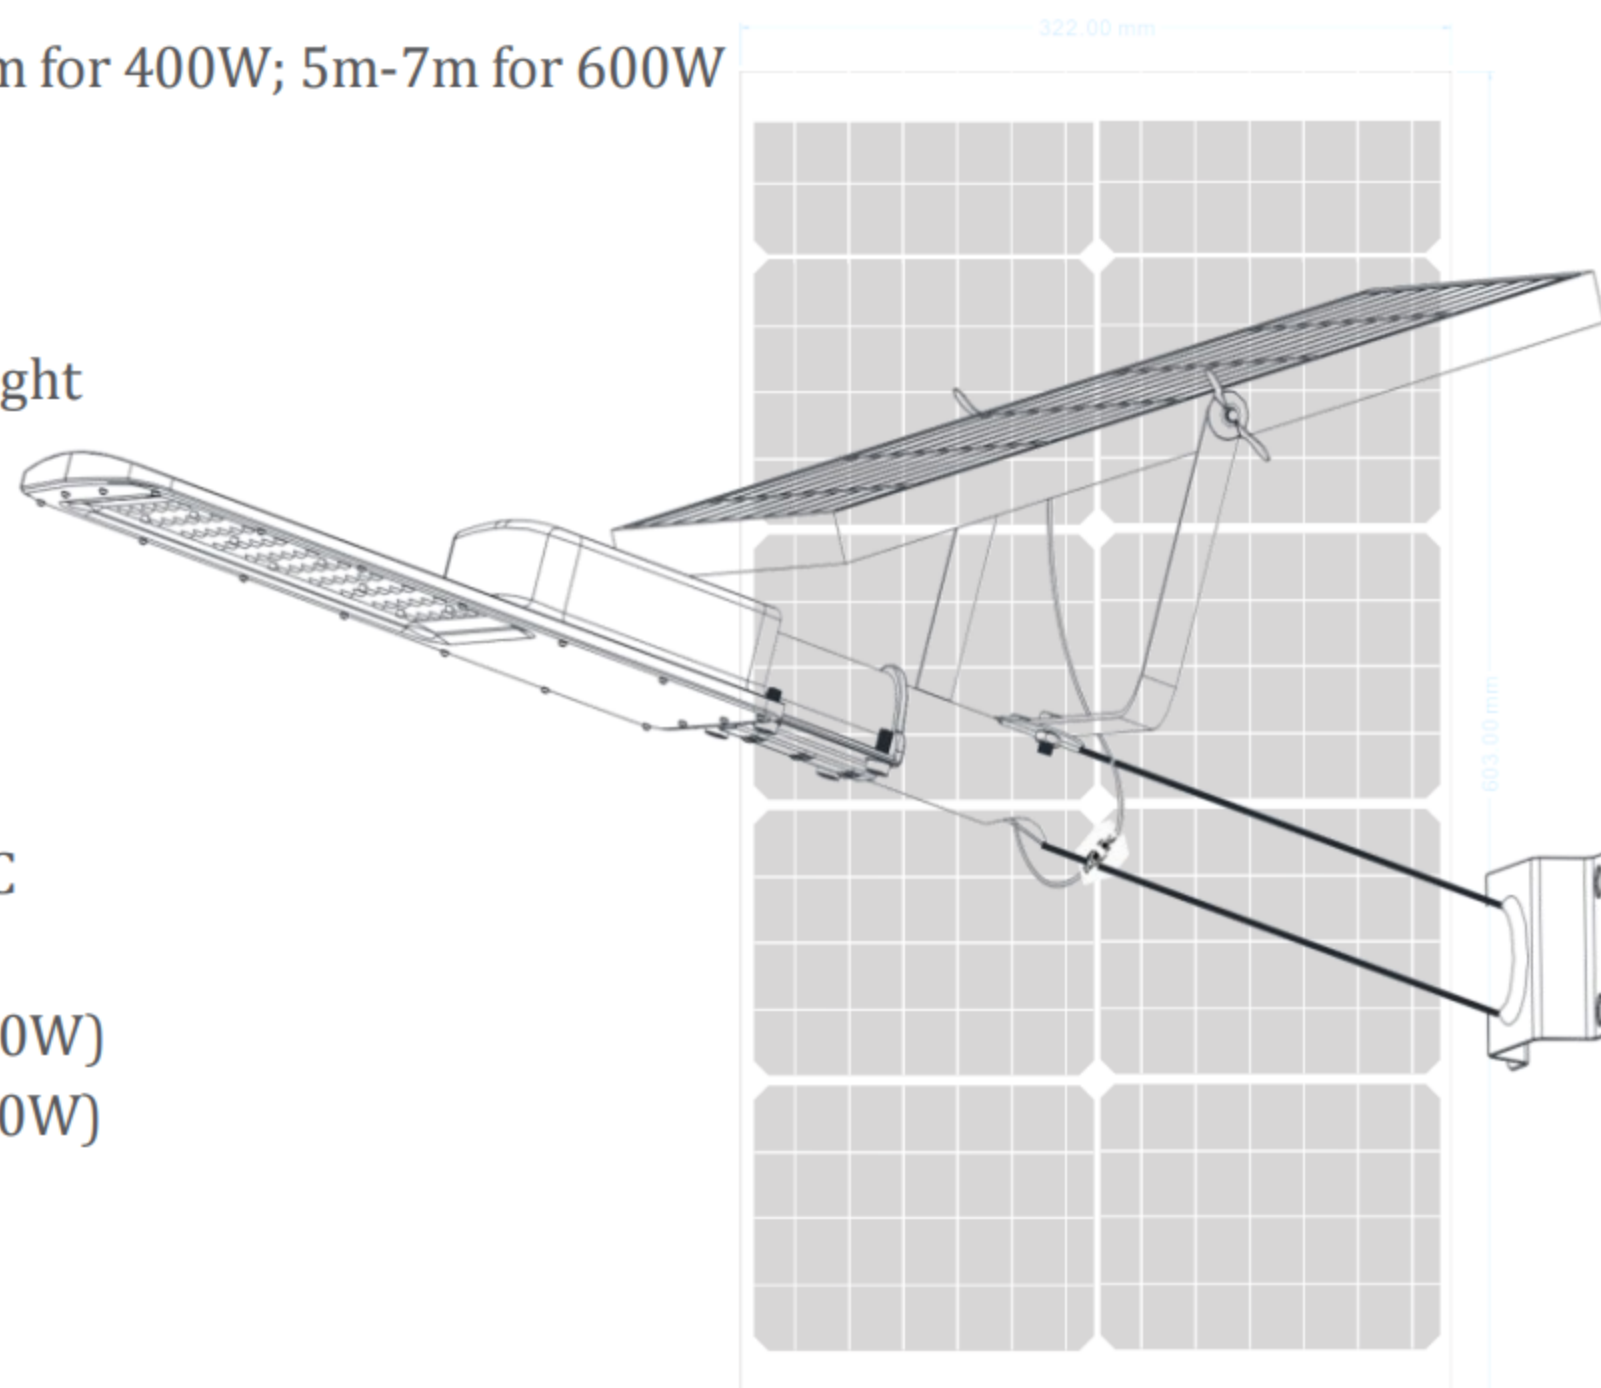

Model	Power (W)	Lumen (lm)	Battery Capacity	Solar Panel (L x W x H)mm	Lamp Size (L x W x H)mm	Net Weight
BSSL-1400	400 W	3200 lm	30000 mAh	350 x 450 x 17	490 x 215 x 60	4.8 Kg
BSSL-1600	600 W	5000lm	40000 mAh	600 x 350 x 17	600 x 255 x 60	6.0 Kg