

BSLight^{ECO}




T5/T8 IP65 Anti Corrosion Fitting



APPLICATION

Mainly used for car porch, loading bays, workshops, laboratories and corridors.

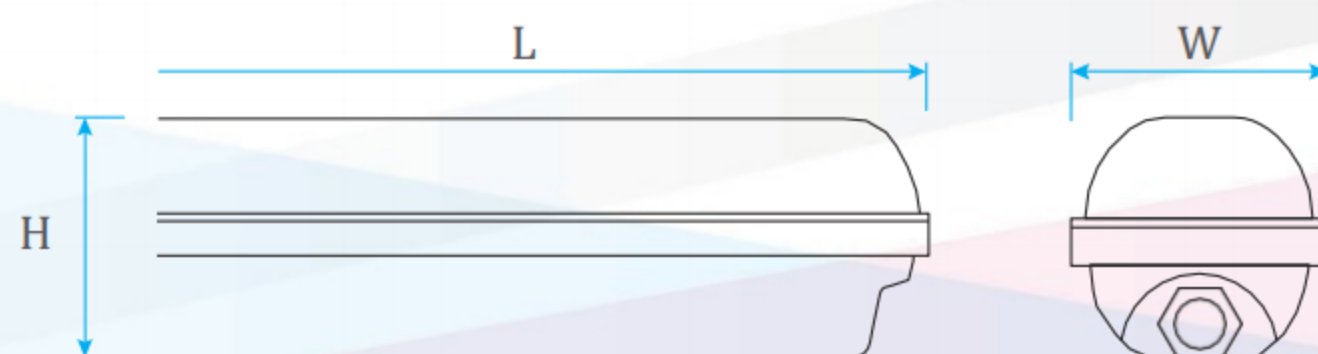



FEATURES

- Suitable for damp & corrosive environment.
- Gaskets are injected into lamp body to form continuous Seal.
- IP 65 degree of protection against dust and water blasting.
- UV protected polycarbonate diffuser with high impact resistance.



SPECIFICATION

Body	▶ ABS / Polycarbonate
Diffuser	▶ Polycarbonate
Lightsource	▶ Fluorescent TLD lamp of 36W / T8 LED / T5 LED (additional accessories)
Electrical	▶ 240V, 50Hz
Clips	▶ Stainless steel clips
Lamp Holder	▶ Moulded from polycarbonate material
Optional Component	▶ Polyester vacuum impregnated ballast / Electrical ballast / Emergency pack

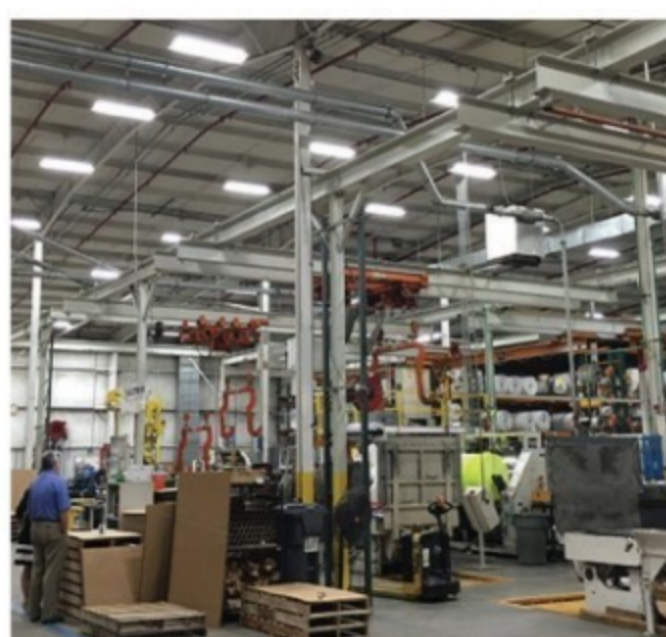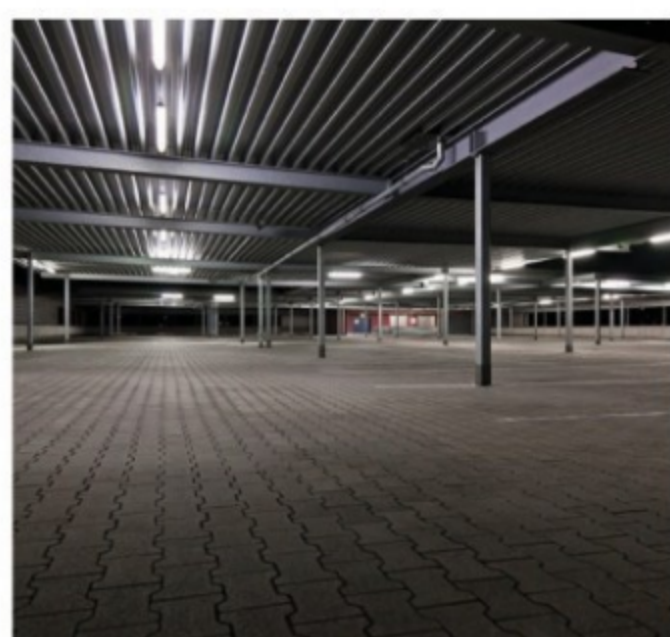

MODEL	NO. OF LAMP	L (mm)	W (mm)	H (mm)	PC/Carton
BCR 120 eco	1 x 2ft	660	80	90	12
BCR 140 eco	1 x 4ft	1265	80	90	12
BCR 240 eco	2 x 4ft	1265	105	90	8