





## Wood/Plaster Ceiling Diffused Fitting with Hinged Frame



### APPLICATION

Mainly used for general lighting in offices, technical workshop, food industry, laboratories, hypermarkets, hospitals, complexes.

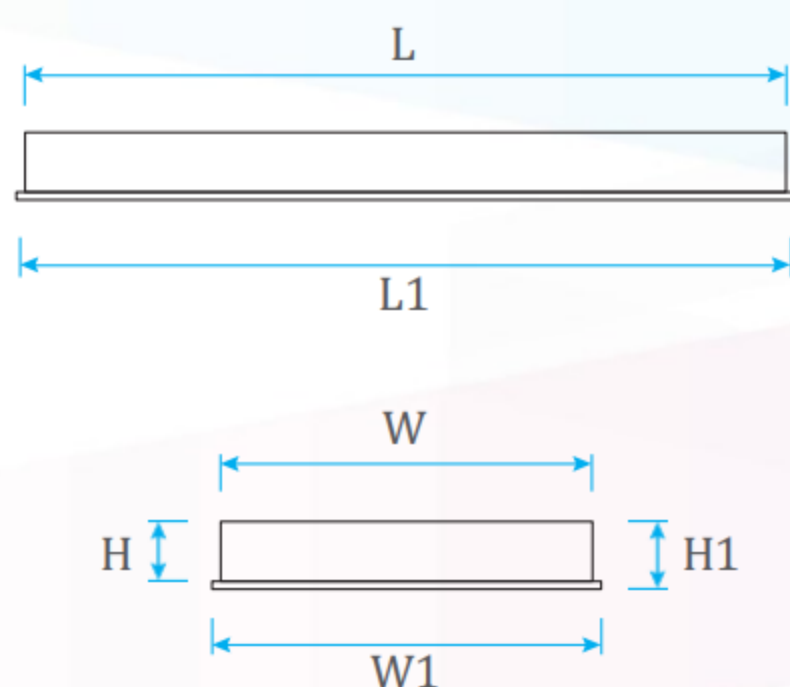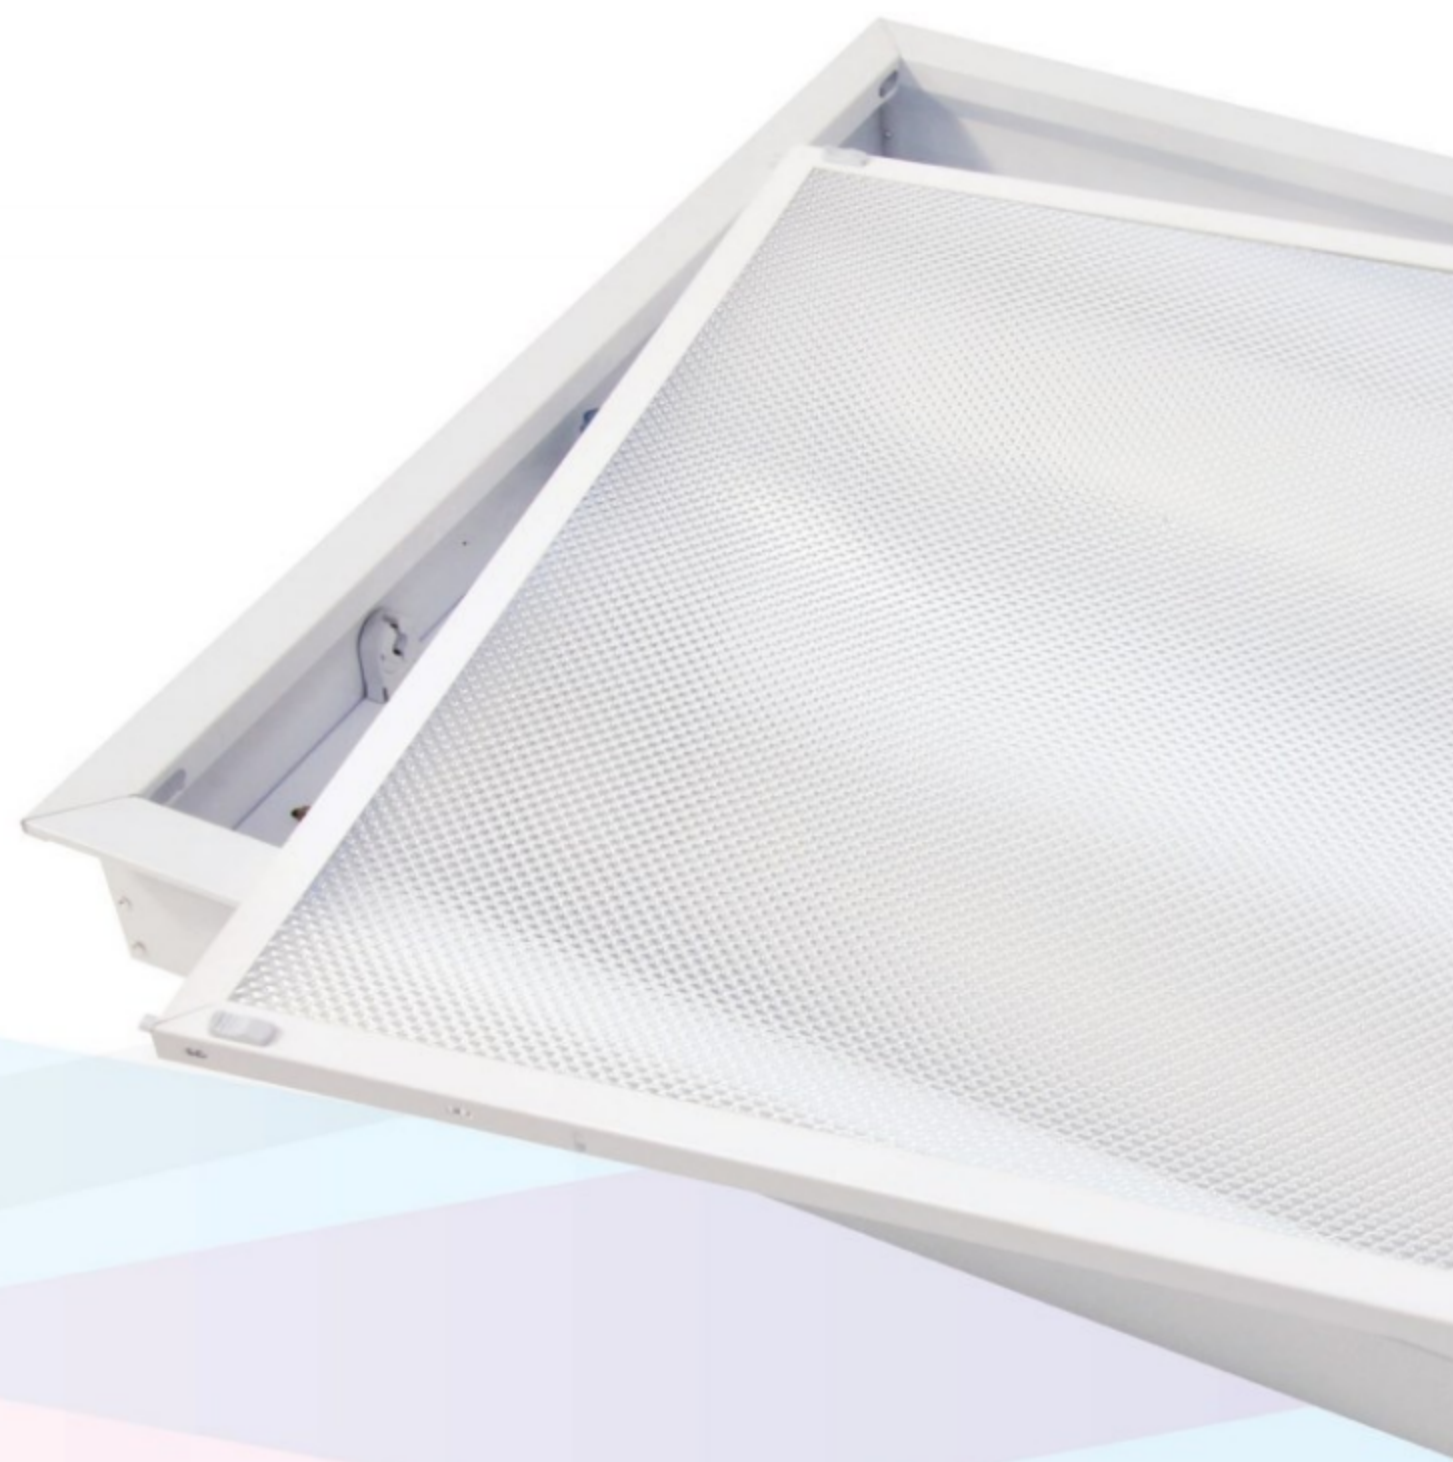

### SPECIFICATION

Type	▶ Wood/plaster ceiling diffused fitting with hinged frame
Model/Code	▶ BMR/HF (wood ceiling hinged frame)
Body	▶ High quality gauge sheet steel
Paint work	▶ Fully coated with epoxy powder coated finished
Mounting	▶ Recessed hinged frame type
Light source	▶ Fluorescent TLD lamp and T8 LED tube
Lampholder & starterholder	▶ Polycarbonate material
Components	▶ Conventional or Electronic ballast, EL emergency power pack, Fused terminal block

MODEL	NO. OF LAMP	L (mm)	L1 (mm)	W (mm)	W1 (mm)	H (mm)	H (mm)
BMR/HF 220 (1' x 2')	2 x 18W	615	635	295	335	78	87
BMR/HF 220	2 x 18W	615	635	600	640	78	87
BMR/HF 320	3 x 18W	615	635	600	640	78	87
BMR/HF 420	4 x 18W	615	635	600	640	78	87
BMR/HF 240 (1' x 4')	2 x 36W	1222	1245	295	335	78	87
BMR/HF 240	2 x 36W	1222	1245	600	640	78	87
BMR/HF 340	3 x 36W	1222	1245	600	640	78	87
BMR/HF 440	4 x 36W	1222	1245	600	640	78	87