




We Serve You Better

## EMERGENCY KELUAR SIGN



Model	: TR218C & TR218C/R
Housing	: Anodised Aluminium Extrusion
Panel	: Acrylic Pictogram
Mode of Operation	: Maintained
Input Voltages	: 230+/- 10%. 50/60Hz
Power Consumption	: < 6.3VA
Lamp Used	: SMD LED
Back Up Duration	: > 3 Hours
Battery	: Sealed Nickel-Cadmium Battery
Safety Feature	: Low Voltage Cut Off to Prevent OverDischarge
Charging Monitoring	: Red LED Indicates Battery Charging
Mounting	: Wall or Ceiling Mounting
Protection Ratings	: IP 20
Dimensions TR218C	: L538mm x D25mm x H198mm
TR218C/R	: D1 - L540mm x D40mm x H55mm D2 - L620mm x D82mm
Weight	: 1.3 kgs
Warranty	: 1 Year from the Date of Delivery
Compliance	: Malaysia Standard MS 619 MS 983 & MS IEC 60598 BOMBA Approved

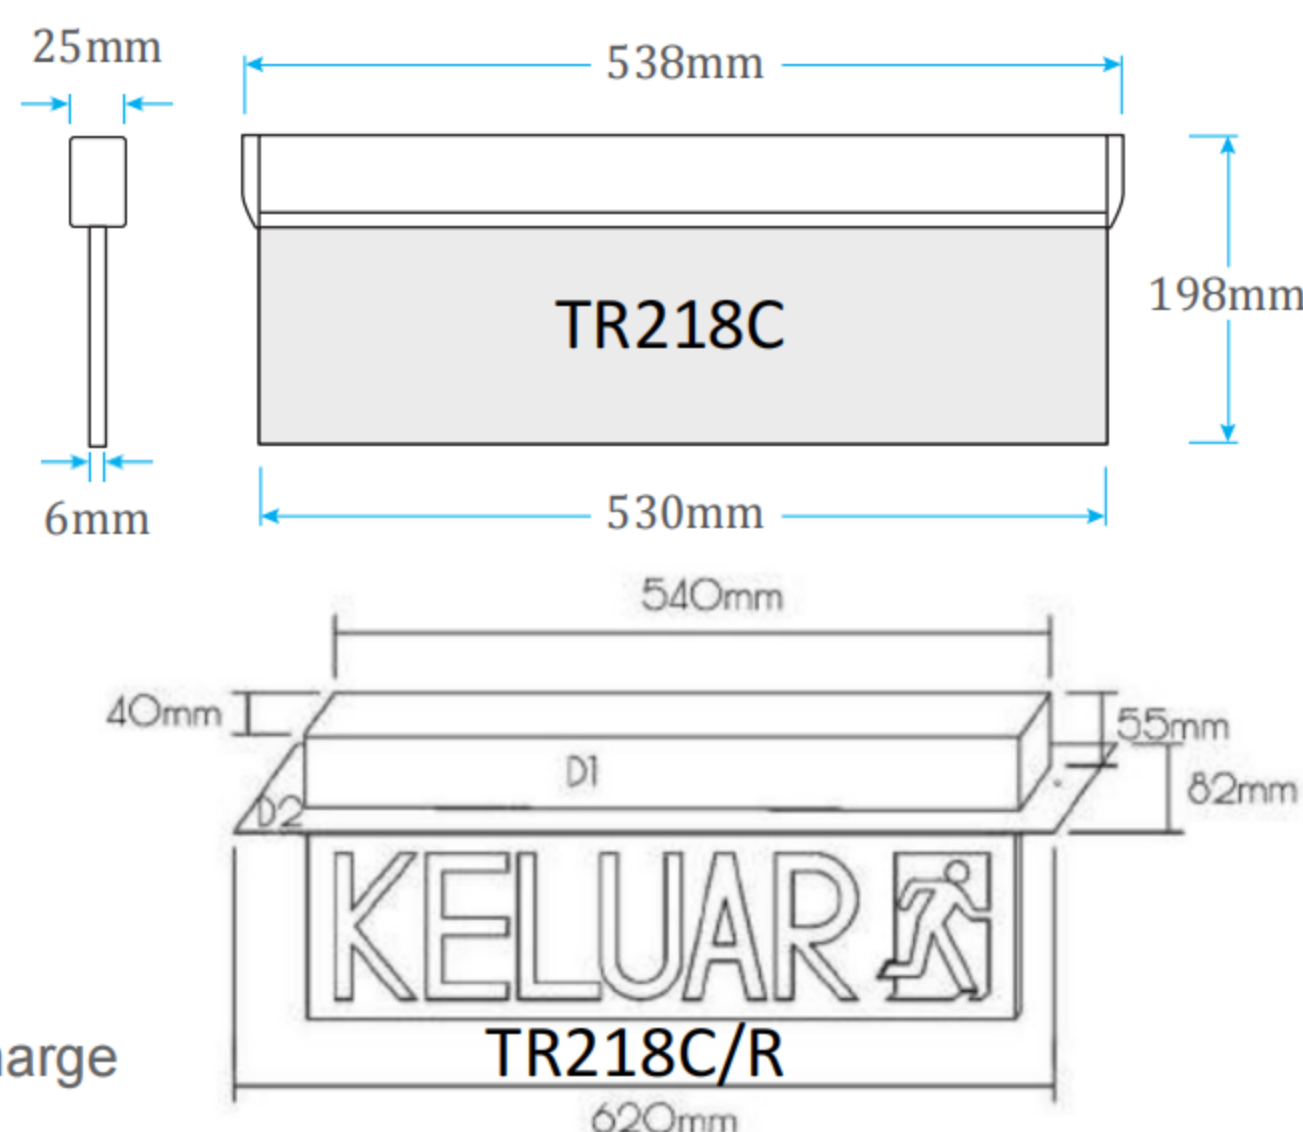

Pictogram	Single Sided	Double Sided	Recess Single	Double Sided/Recess
	TR218C (KM)	TR218C/D (KM)	TR218C/R (KM)	TR218C/RD (KM)
	N/A	TR218C/D (KLR)	N/A	TR218C/RD (KLR)
	TR218C-LRA	TR218C/D (LRA)	TR218C/R (LRA)	TR218C/RD (LRA)

- ♦ Quality Assured by Full SIRIM Licence in Malaysia since 1992.
- ♦ Approved by Director General of Fire Service in Malaysia.
- ♦ Approved by Standard & Industrial Research Institute of Malaysia (SIRIM).
- ♦ Approved by Chief Electrical Inspector of Malaysia.
- ♦ Complies Fully with Uniform Building By-Law Regulations in Malaysia.



Note: Due to continuous development and improvement, our company reserve the right to change specification without notice