




We Serve You Better



SURFACE BOX UP LED EMERGENCY LIGHT

Model	: TRE208L
Mode of Operation	: Non-maintained
Input Voltage	: 240V \pm 10%, 50Hz
Rated Duration	: 3 hours
Battery Type	: 3.6V 900mah Ni-Cd Battery
Lamp Used	: 12 X 0.2W SMD LED
Brightness Output	: 120 Lux
Luminosity Output	: 76 lm
Power Consumption	: 4 VA
Charger	: Solid State Electronic Automatic
Charging Monitor	: Red LED 5mm Diameter
Test Facility	: Independent Testing
Operation Temperature	: 25°C
Safety Feature	: Low Voltage Cut-off to Prevent Over-discharge of the Battery, Incoming AC Fuse.
Fitting Construction	: Metal Casing Finish in Epoxy Powder Coating Using "clip-on" Design for Easy Installation.
Diffuser	: Prismatic Acrylic Diffuser
Product Dimension	: L360mm X W116mm X H80mm
Mounting	: Wall or Ceiling Mounting
Compliance	: Malaysia Standards MS 619 MS IEC 60598 BOMBA Approved
Warranty	: 1 Year from the Date of Delivery
Weight	: 1 kg

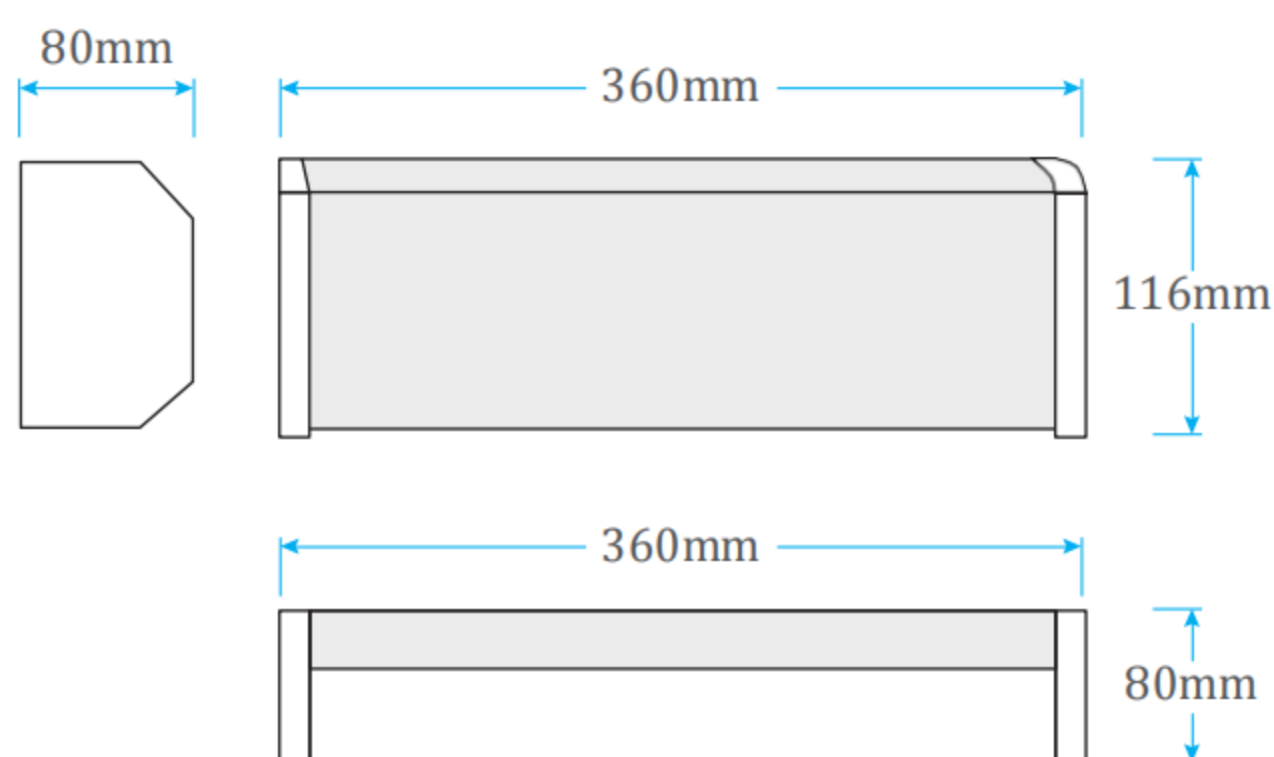

- ♦ Quality Assured by Full SIRIM Licence in Malaysia since 1992.
- ♦ Approved by Director General of Fire Service in Malaysia.
- ♦ Approved by Standard & Industrial Research Institute of Malaysia (SIRIM).
- ♦ Approved by Chief Electrical Inspector of Malaysia.
- ♦ Complies Fully with Uniform Building By-Law Regulations in Malaysia.

Note: Due to continuous development and improvement, our company reserve the right to change specification without notice

