



T8 LOWBAY FITTING MIRROR ACRYLIC DIFFUSER IP54



PHILIPS

Features

- Aluminium toggle clips.
- 0.35mm thickness pre anodised 99.85% high purity specular aluminium reflector.
- 0.5mm cold roll steel construction.
- Coated with high gloss white epoxy powder.
- Clear acrylic cover.
- IP54
- Internal wiring with heat resistant rated 105°C wire.


Applications

Ideal for food industry, production, corridor, where low bay surface mounted light is required, or cleaning of luminaire housing is frequent.

Specifications



Efficiency	111Lm/W
Input Voltage	AC 220~240V
PF	0.92
LED Tube	PHILIPS CorePro HO
Driver	PHILIPS
CCT	4000K / 6500K
CRI	80Ra
Beam Angle	90° x 100°
Rated Life	30,000Hrs
IP	IP54
Operating Temperature	-20°C ~ +45°C
Material	Steel (body) Clear Acrylic (cover)
Warranty	2 Years

Photometric

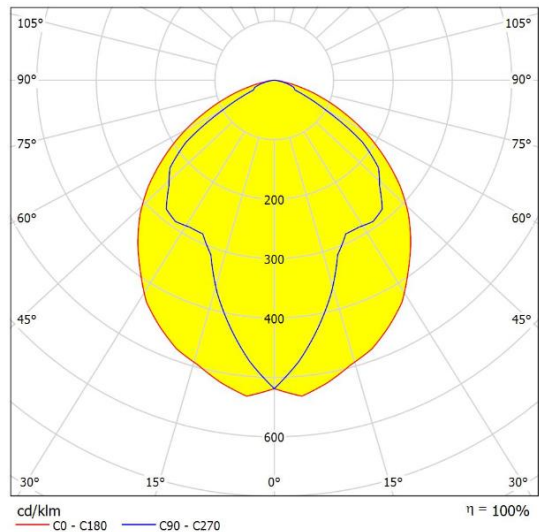

Mounting

Surface Mount



Model	Power	Lumen	Dimension	Weight
VSL-T8LB236 S	2 x 18W	4,200Lm	1224(L)x203(W)x90(H)mm	5.0kg