



LED PANEL FITTING POLYSTYRENE DIFFUSER IP20



Features

- Excellent light uniformity.
- Coated with high gloss white epoxy powder.
- Polystyrene diffuser.
- Standard Deviation Colour Matching (SDCM) ≤ 5
- Unified Glare Rating (UGR) ≤ 22
- IP20
- IK02


Applications

Ideal for food industry, production, corridor, where low bay surface mounted light is required, or cleaning of luminaire housing is frequent.

Specifications



Efficiency	90Lm/W
Input Voltage	AC 220~240V
PF	>0.9
LED	PHILIPS Certaflux Panel G2
Driver	PHILIPS
CCT	4000K / 6500K
CRI	80Ra
Beam Angle	120°
Rated Life	30,000Hrs
IP / IK	IP20 / IK02
Operating Temperature	-10°C ~ +30°C
Material	Steel (body) Polystyrene (cover)
Warranty	2 Years

Photometric

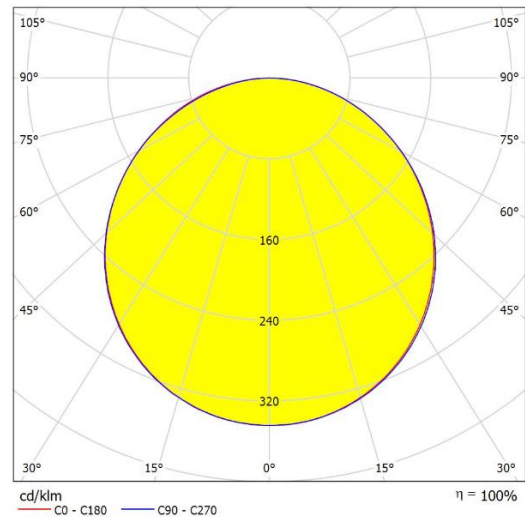

Mounting

Surface Mount



Model	Power	Lumen	Dimension	Weight
VSL-LPS22 S (595*595)	40W	3,600Lm	650(L)x650(W)x50(H)mm	6.5kg