



YH LED FLOOD LIGHT

Features:

- Stylish ultra thin radiator design.
- High Efficiency thermal management design.
- Cost effective.

Application:


Ideal for compound lighting, building, industrial areas, warehouse, and advertisement board.



Specifications

Efficiency	100Lm/W
Input Voltage	AC 100 ~ 277V
PF	0.9
LED	EPISTAR
Driver	IN-HOUSE DRIVER
CCT	3000K / 4000K / 5700K
CRI	70Ra
Beam Angle	120°
Rated Life	30,000Hrs
IP	IP65
Operating Temperature	-20°C ~ +45°C
Material	Aluminium Alloy (Body) Tempered Glass (Cover)
Warranty	1 Year

Photometric

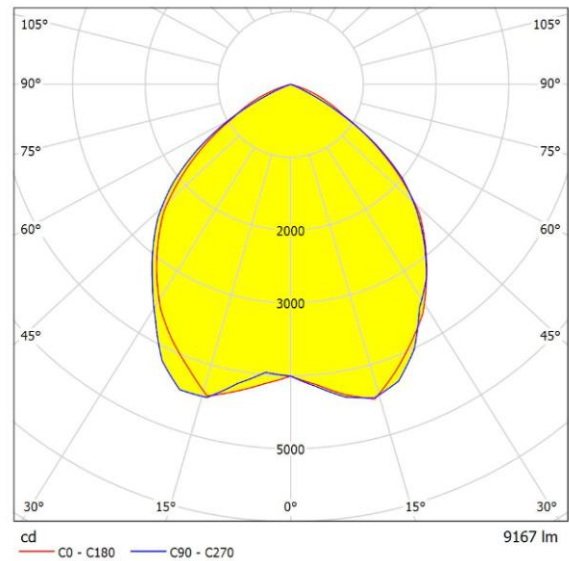

Model	Power	Lumen	Dimension	Weight
VSL-YH-10W	10W	1000Lm	130mm x 110mm x 45mm	0.46kg
VSL-YH-20W	20W	2000Lm	185mm x 160mm x 50mm	0.76kg
VSL-YH-30W	30W	3000Lm	195mm x 170mm x 55mm	1.09kg
VSL-YH-50W	50W	5000Lm	240mm x 210mm x 60mm	1.49kg
VSL-YH-100W	100W	10000Lm	285mm x 255mm x 75mm	2.56kg
VSL-YH-150W	150W	15000Lm	345mm x 310mm x 80mm	3.87kg
VSL-YH-200W	200W	20000Lm	380mm x 350mm x 95mm	5.50kg