



## ZY-L26 LED STREET LIGHT



### Specifications

Efficiency	170Lm/W
Input Voltage	AC 100 ~ 277V
PF	0.95
LED	SAN'AN
Driver	MOSO
CCT	3000K / 4000K / 5000K / 5700K / 6500K
CRI	70Ra
Beam Angle	Type I, II, III
Rated Life	50,000Hrs
IP / IK	IP66 / IK10
Operating Temperature	-40°C ~ +50°C
Material	Aluminium 6063-T5 (body) Polycarbonate (lens)

### Features:

- Exclusive zero air gap lens technology, achieve zero light loss. Light transmission rate reaches 98%.
- Use cooling duct design, product overall weight reduction and thermal performance.
- Modular design can effectively reduce maintenance cost.
- Over-current, over-voltage, lightning, high temperature protection to fully guarantee the lifespan and stable performance.
- Built-in surge protection 4kV (line-line), 6kV (line-earth)
- NEMA control system optional.

### Applications:

Ideal for highway, urban roads, secondary roads, stadium, sidewalk, residential area, industry sites, square area, park, school, villa, and courtyard.

### Compliance Standard:


LED LM-80  
 Driver CCC, CE, CB, UL  
 EN61347, EN55015, EN61000, EN61547  
 Luminaire CE, CB, RoHS





Model	Power	Lumen	Weight
VSL-ZY-L2601-50	50W	8,500Lm	6.35kg
VSL-ZY-L2602-100	100W	17,000Lm	6.35kg
VSL-ZY-L2603-150	150W	25,500Lm	6.35kg
VSL-ZY-L2604-200	200W	34,000Lm	7.20kg
VSL-ZY-L2605-250	250W	42,500Lm	7.20kg





## Dimension

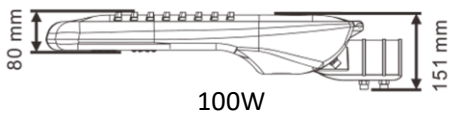



100W

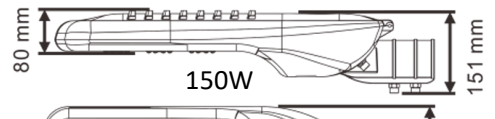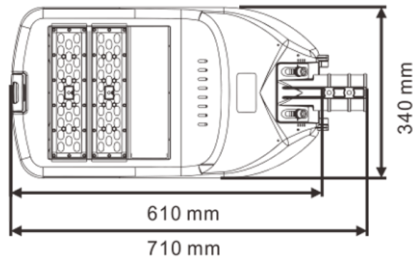


150W

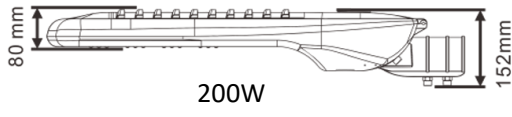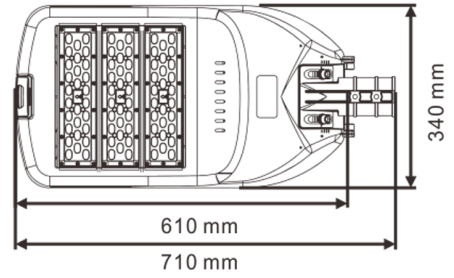


200W

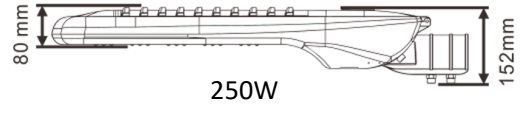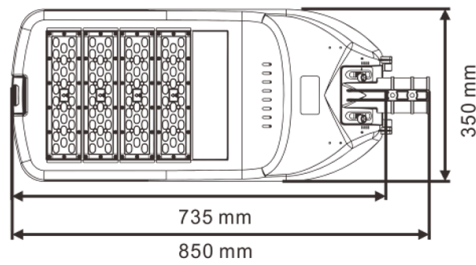


250W

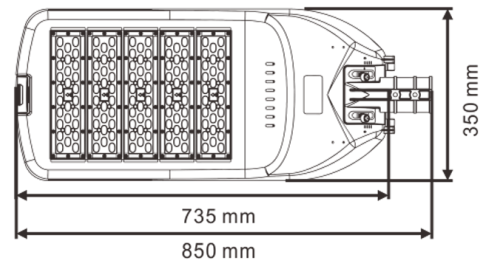


## Photometric

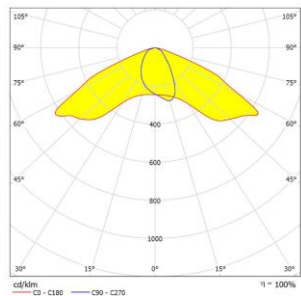


Type I

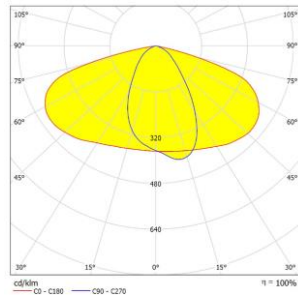

Type II

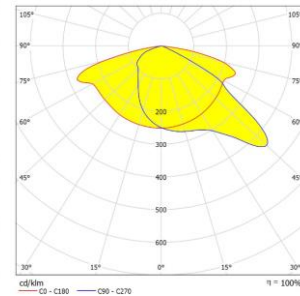

Type III

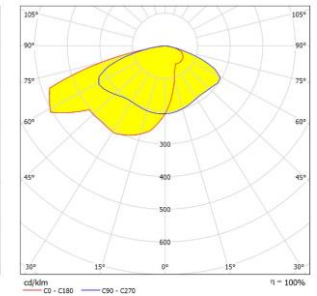

Type IV