



STAINLESS STEEL WEATHERPROOF FITTING



Polycarbonate Diffuser



Tempered Glass Diffuser

Specifications

Type of Tube	T8 LED Tube
Terminal	24A 450V T110 VDC CE Rohs
Lamp Holder	G13
Gland	PG13.5 nickel plated copper
Gasket	Silica Gel
Inner Wiring	Copper wire (1 x 0.5mm ²)
Class	Class I
IP	IP65
Mounting	Suspended
Diffuser Material	Tempered Glass / Polycarbonate PC
Body Material	Stainless Steel 304

Features:

- Stainless steel 304 material body 0.7mm with high impact resistance, non-deformable structure for installations in environments with vibration.
- Specular aluminium reflector 0.4mm ensures optional recovery of the light output
- Available diffuser material: Tempered Glass 5mm / Polycarbonate 2.5-3mm
- Wiring: 3-way wiring design for **PHILIPS** / **OSRAM** LED Tube only. Optional: double-ended wiring / magnetic ballast / emergency power pack.




Applications:

Ideal for Indoor & outdoor areas with high IP requirement, food industries, chemical plants, swimming pool areas, dusty humid and corrosive environments, washing houses, breweries, under canopy areas, pharmaceutical factories, loading bays, food, packing areas, garages, etc.

Model	No. of Tube	Dimension	Weight
VSL-SS136T8PC	1 x T8 1200mm	1300(L) x 140(W) x 110(H)mm	4.7kg
VSL-SS236T8PC	2 x T8 1200mm	1300(L) x 140(W) x 110(H)mm	4.7kg
VSL-SS136T8	1 x T8 1200mm	1300(L) x 140(W) x 90(H)mm	6.0kg
VSL-SS236T8	2 x T8 1200mm	1300(L) x 190(W) x 90(H)mm	6.5kg



Dimension:

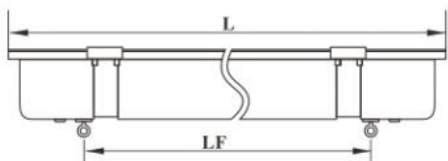


PC Diffuser

LF = 1100mm
 L = 1300mm W1 = 140mm
 H = 110mm

Tempered Glass Diffuser

LF = 1100mm
 L = 1300mm W1 = 140mm
 H = 90mm W2 = 190mm

Photometric:

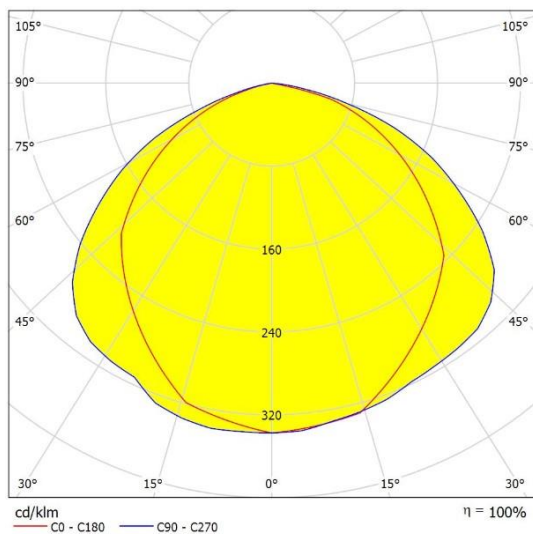

Accessories:



Stainless Steel Clip x 10pcs



Cable Gland PG 13.5 x 1pc



Stainless Steel Eye Bolt x 2pcs