





Specification

Model Name	NEW-FBF011	
Input Voltage	AC90-265V	
Power Frequency	50/60Hz	
Power Factor	≥0.96	
Wattage	80W	100W
Lamp Luminous Flux (LM)	> 8800 lm	> 11000lm
Luminous Efficiency	110-130 lm/W	
LED Working Voltage	DC30-42V	

CCT	2700- 3500K
	3500-5000K
	5000-6500K
CRI	Ra≥85
Operating Temperature	-30°C~ +45°C
IP Rating	IP65
Anti-corrosion	WF2
LED Lifespan	> 50,000 hours

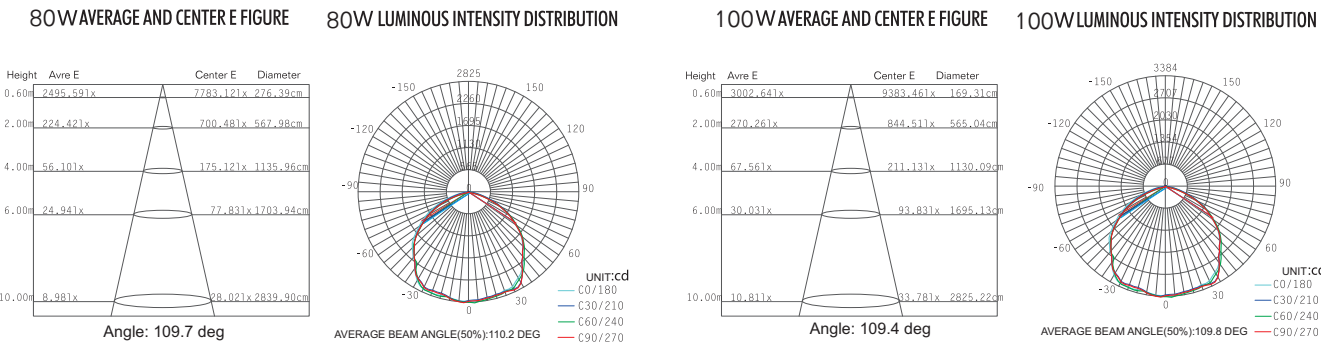

Dimension(mm)& Fixture Installation

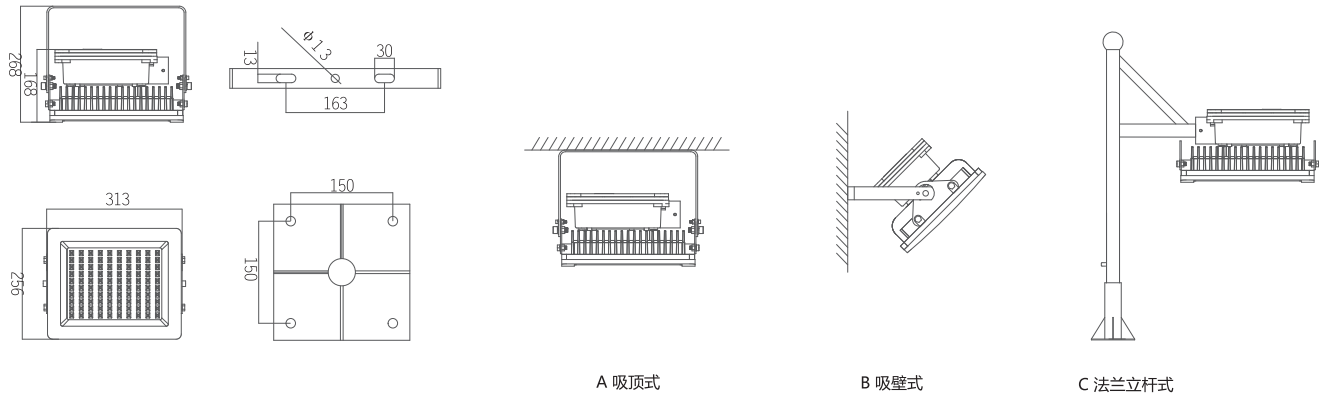

Package



N.W.: 7.5kg
Outer carton size: 34*28*22cm (1pcs/ctn)
G.W.: 10kg/ctn

Features

Body

Body in die-cast copper-free aluminum alloy, treated by electrostatic spraying, with good performance of high temperature resistance and climate resistance. Tempered glass with good transmittancy.

Driver

Isolation Class I, Protection: OPP/OVP/SCP/OTP, Wide input voltage 90-265Vac, built-in active PFC > 0.96, THD < 15%, Surge Protection 10KV/6KV/4KV

Sources

LED light source with different possibilities of temperature color (standard Natural White 4000K, executions on request also with 3000K, 6000K).High coefficient of performance chromatic CRI≥85. lifespan>50,000hrs.

Application

Ideal to be used in the oilfield, chemical industry, steel industry, power, port, Petroleum etc. Harsh environment, moist area. Zone 1, Zone2 Gas explosive environment: Group IIA IIB IIC Temperature class: T5 to T6