




LED STREET LIGHT

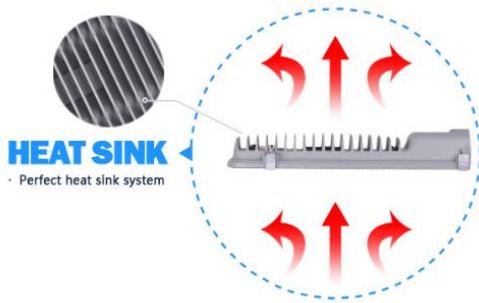

- 4KV lighting protection.
- Stainless steel screws.
- High efficiency aluminium heat dissipation fins.

Specifications

Efficiency	100Lm/W
Input Voltage	AC 100 ~ 277V
PF	0.95
LED / Driver	EPISTAR / IN-HOUSE
CCT	3000K / 4000K / 5700K
CRI	70Ra
Beam Angle	60° x 120°
Rated Life	50,000Hrs
IP	IP65
Material	Glass Diffuser, Aluminium Body



Model	Watt	Lumen	Dimension	MOQ
LP-LD08-12W	12W	1200Lm	350mm*95mm*60mm	10 pcs
LP-LD08-24W	24W	2400Lm	385mm*140mm*60mm	10 pcs
LP-LD08-30W	30W	3000Lm	480mm*160mm*60mm	10 pcs
LP-LD08-40W	40W	4000Lm	520mm*220mm*60mm	10 pcs
LP-LD08-50W	50W	5000Lm	520mm*220mm*60mm	10 pcs
LP-LD08-60W	60W	6000Lm	550mm*250mm*60mm	10 pcs
LP-LD08-80W	80W	8000Lm	550mm*250mm*60mm	10 pcs