



LED UFO-III HIGH BAY




Specifications

Efficiency	120-130Lm/W
Input Voltage	AC 90 ~ 305V
PF	0.97
LED / Driver	LUMILEDS LUXEON 3030 2D / MEAN WELL
CCT	3000K / 4000K / 5000K / 5700K
CRI	80Ra
Beam Angle	120°
Rated Life	50,000Hrs
IP	IP65
Operating Temperature	-25°C ~ +45°C
Material	Aluminium 6063
Warranty	3 Years

Optional Add-ons:

- Emergency Control Module and Battery.
- Wire Sensor Version – DALI Dimming / 1-10V Dimming / PWM Dimming
- Wireless Sensor Version – PIR Sensor / Microwave Sensor / Daylight Sensor
- Smart Function – Internal Wireless Control System (Computer, Smartphone, Touch Panel)

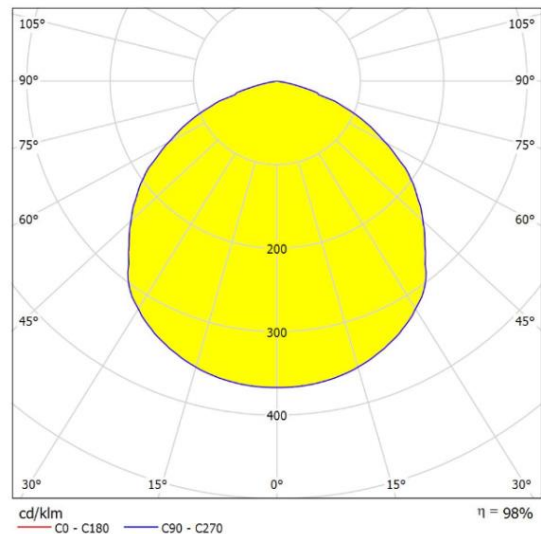

Model	Watt	Lumen	Dimension
VSL-UFO-III-100	100W	12000~13000Lm	Ø 320 x 187mm
VSL-UFO-III-150	150W	18000~19500Lm	Ø 320 x 187mm
VSL-UFO-III-200	200W	24000~26000Lm	Ø 400 x 208mm
VSL-UFO-III-240	240W	28800~31200Lm	Ø 400 x 208mm