



VSL YH2 LED FLOOD LIGHT



Specifications

Efficiency	90Lm/W
Input Voltage	AC 100 ~ 260V
PF	> 0.6
LED	SAN'AN
Driver	DOB
CCT	3000K / 4000K / 5000K / 5700K / 6500K
CRI	80Ra
Beam Angle	100°
Rated Life	20,000Hrs
IP / IK	IP66 / IK10
Operating Temperature	-20°C ~ +45°C
Material	Aluminium (body) Polycarbonate (lens)

Features:

- Stylish ultra thin radiator design.
- High Efficiency thermal management design.
- Cost effective.
- Come with waterproof respirator.
- Compact and light weight/
- Easy to install.
- Durable advanced PC materials

Applications:

Ideal for compound lighting, building, industrial areas, warehouse, and advertisement board.

Compliance Standard:

LED LM-80

Model	Power	Lumen	Dimension	Weight
VSL-YH2-50	50W	4,500Lm	230*205*35mm	0.72kg
VSL-YH2-100	100W	9,000Lm	280*255*35mm	1.18kg
VSL-YH2-150	150W	13,500Lm	310*280*40mm	1.52kg
VSL-YH2-200	200W	18,000Lm	330*300*40mm	2.00kg



Waterproof Respirator

Balance The Internal Air Pressure, Better Waterproof, So That The Lamp Life Longer.



Chips

High Brightness LED Chips, High Efficiency.




Waterproof silicon screw



High quality waterproofing




Sicker silicon cable

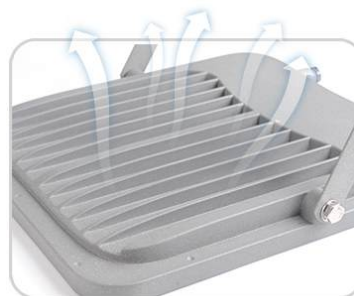

Creative design

Innovative design, more beautiful appearance. Excellent heat dissipation performance.

Photometric

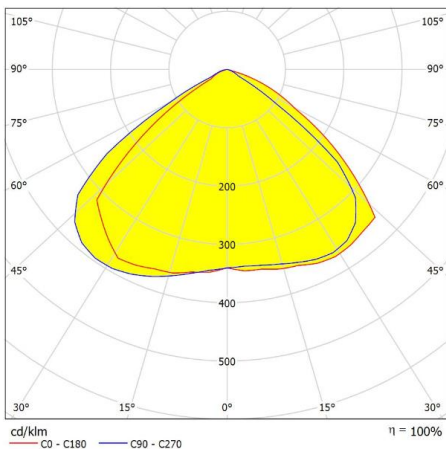

100°